


TRANSITION LEVEL BY ATC  
TRANSITION ALTITUDE 3000 ft AMSL

GENERAL PROFILE

DO NOT DESCEND BELOW THE DESCENT PROFILE

- Missed approach:
  - Inform ATC immediately.
  - RWY track MAG and climb to 2000 ft AMSL.
- Missed approach in case of communication failure:
  - RWY track MAG and climb to 3000 ft AMSL;
  - After passing 2000 ft AMSL start the shortest climbing turn to SPL so as to cross SPL at 3000 ft AMSL and hold or execute the most suitable instrument approach procedure.

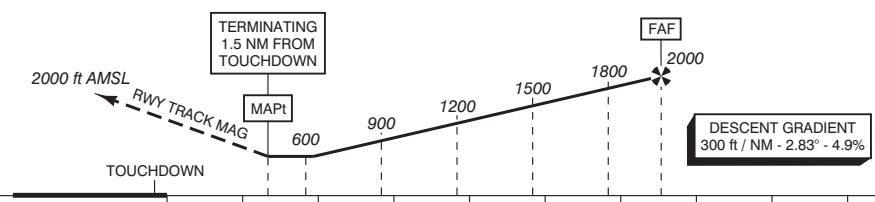

DIST RELATED TO TOUCHDOWN	0 NM	1.5	2	3	4	5	6	6.7
GS IN KT	100	120	140	160	180	200	220	
VERTICAL SPEED	500 ft/min	600 ft/min	700 ft/min	800 ft/min	900 ft/min	1000 ft/min	1100 ft/min	

OCA (OCH)					
RWY	04	06	09	24	36C
ELEV	-13	-11	-12	-12	-12
OCA	570	570	570	570	570
OCH	580	580	580	580	580
MAPt	1.5 NM FROM TOUCHDOWN				
CIRCLING *	A: 620 (630)		B: 780 (790)		C: 880 (890) D: 890 (900)
CEILING AND VISIBILITY MINIMA					
TAKE-OFF	DAY: NA		NIGHT: NA		
LANDING	DAY: NA		NIGHT: NA		

