


STANDARD DEPARTURE CHART -
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE
5000

LAJES (LPLA)
LM VOR RWY 15/33
DOLER 1B, DOLER 1D

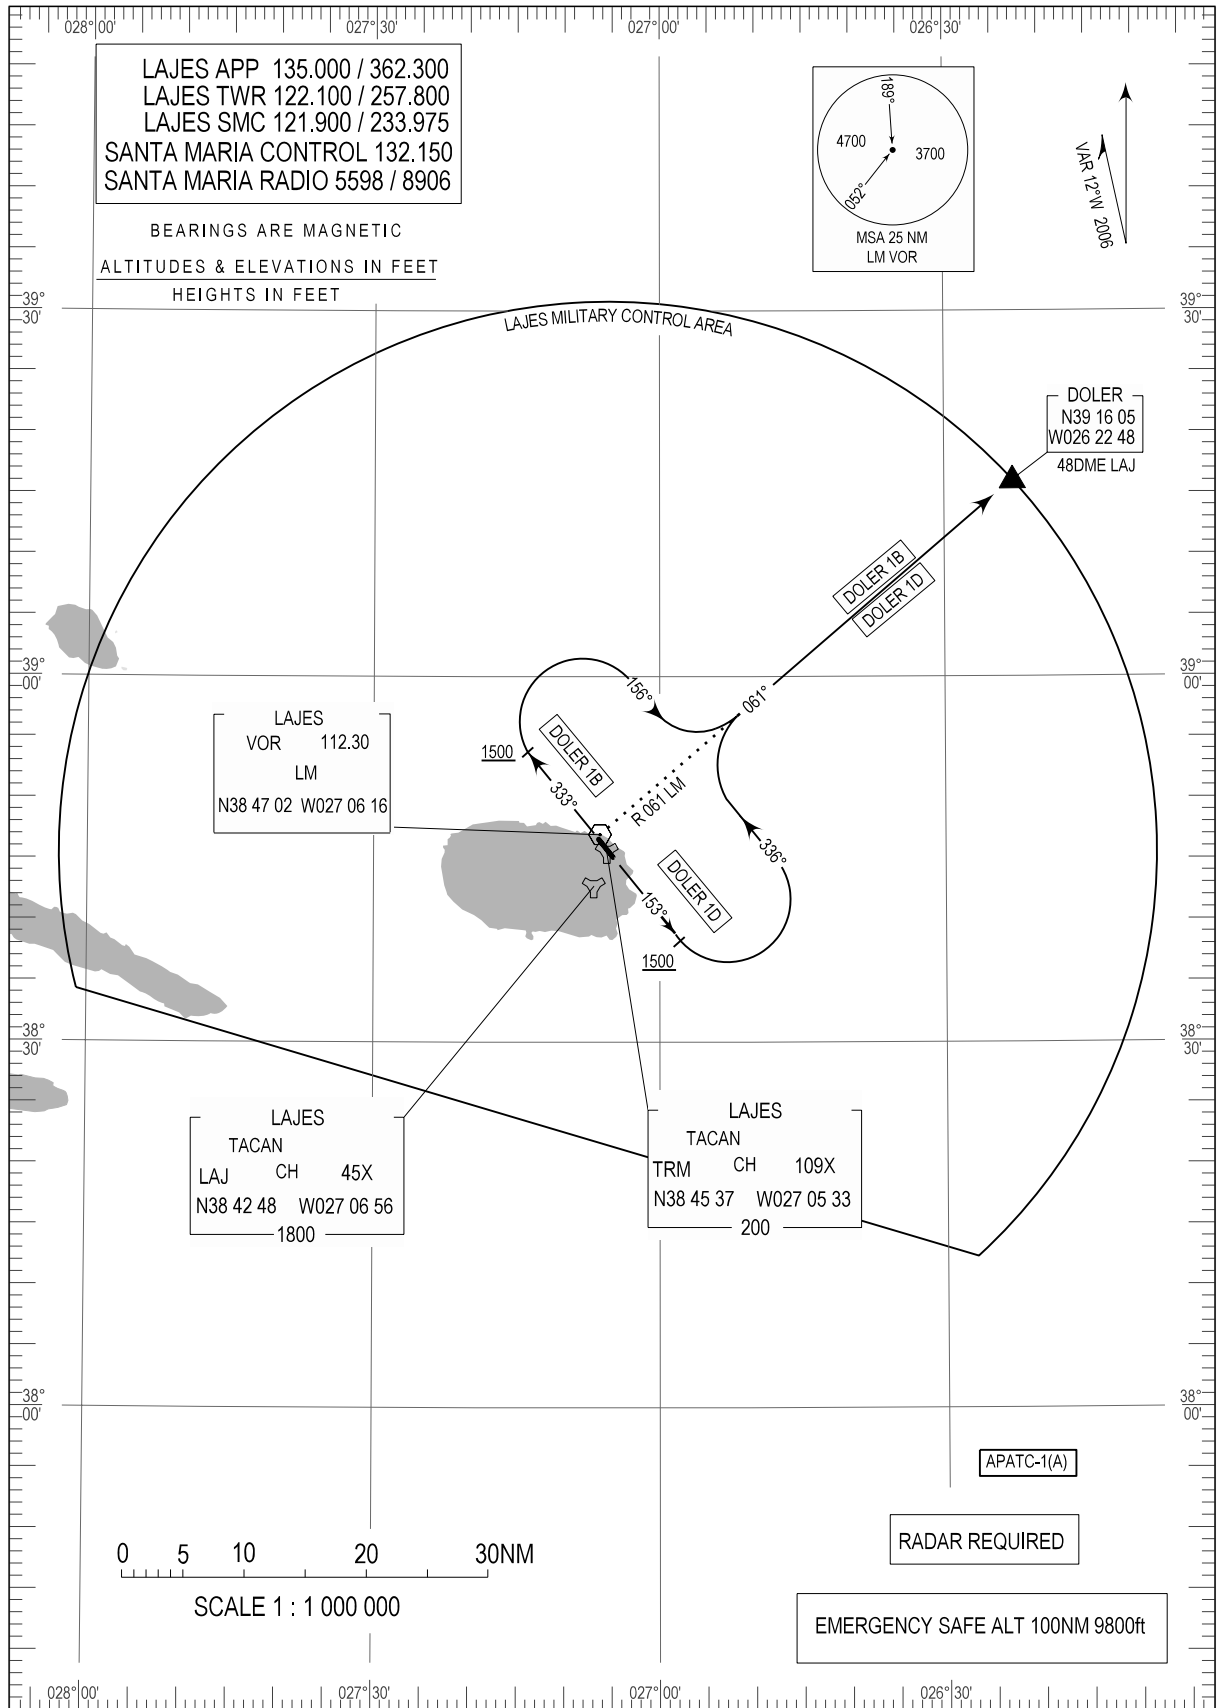

Distance DOLER changed. Sid description on verso of chart

STANDARD INSTRUMENT DEPARTURE (SID) RWY 15/33 LM VOR

RUNWAY 33				
Designator	Route	After Take-off		Remarks
		Climb to ALT / FL	Contact	
DOLER1B	Climb on 333 DEG Track to 1500FT, Turn right, intercept LM RDL061 to DOLER (RDL061 LM VOR / 48DME LAJ)		LAJES APPROACH 135.000MHZ / 362.300MHZ	RADAR REQUIRED CAUTION Rising terrain both sides of departure courses requires close adherence to the departure track to assure obstruction clearance

Minimum Climb rate until passing 4700FT							
Runway	Knots	60	120	180	240	300	360
33	Vertical velocity (Feet per minute)	270	540	810	1080	1350	1620

RUNWAY 15				
Designator	Route	After Take-off		Remarks
		Climb to ALT / FL	Contact	
DOLER1D	Climb on 153DEG Track to 1500FT, Turn left, intercept LM RDL061 to DOLER (RDL061 LM VOR / 48DME LAJ)		LAJES APPROACH 135.000MHZ / 362.300MHZ	RADAR REQUIRED CAUTION Rising terrain both sides of departure courses requires close adherence to the departure track to assure obstruction clearance NOTE Cross departure end RWY 15, at least, 25FT AGL or 205FT MSL

Minimum Climb rate until passing 4700FT							
Runway	Knots	60	120	180	240	300	360
15	Vertical velocity (Feet per minute)	320	640	960	1280	1600	1920