


STANDARD DEPARTURE CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV SID

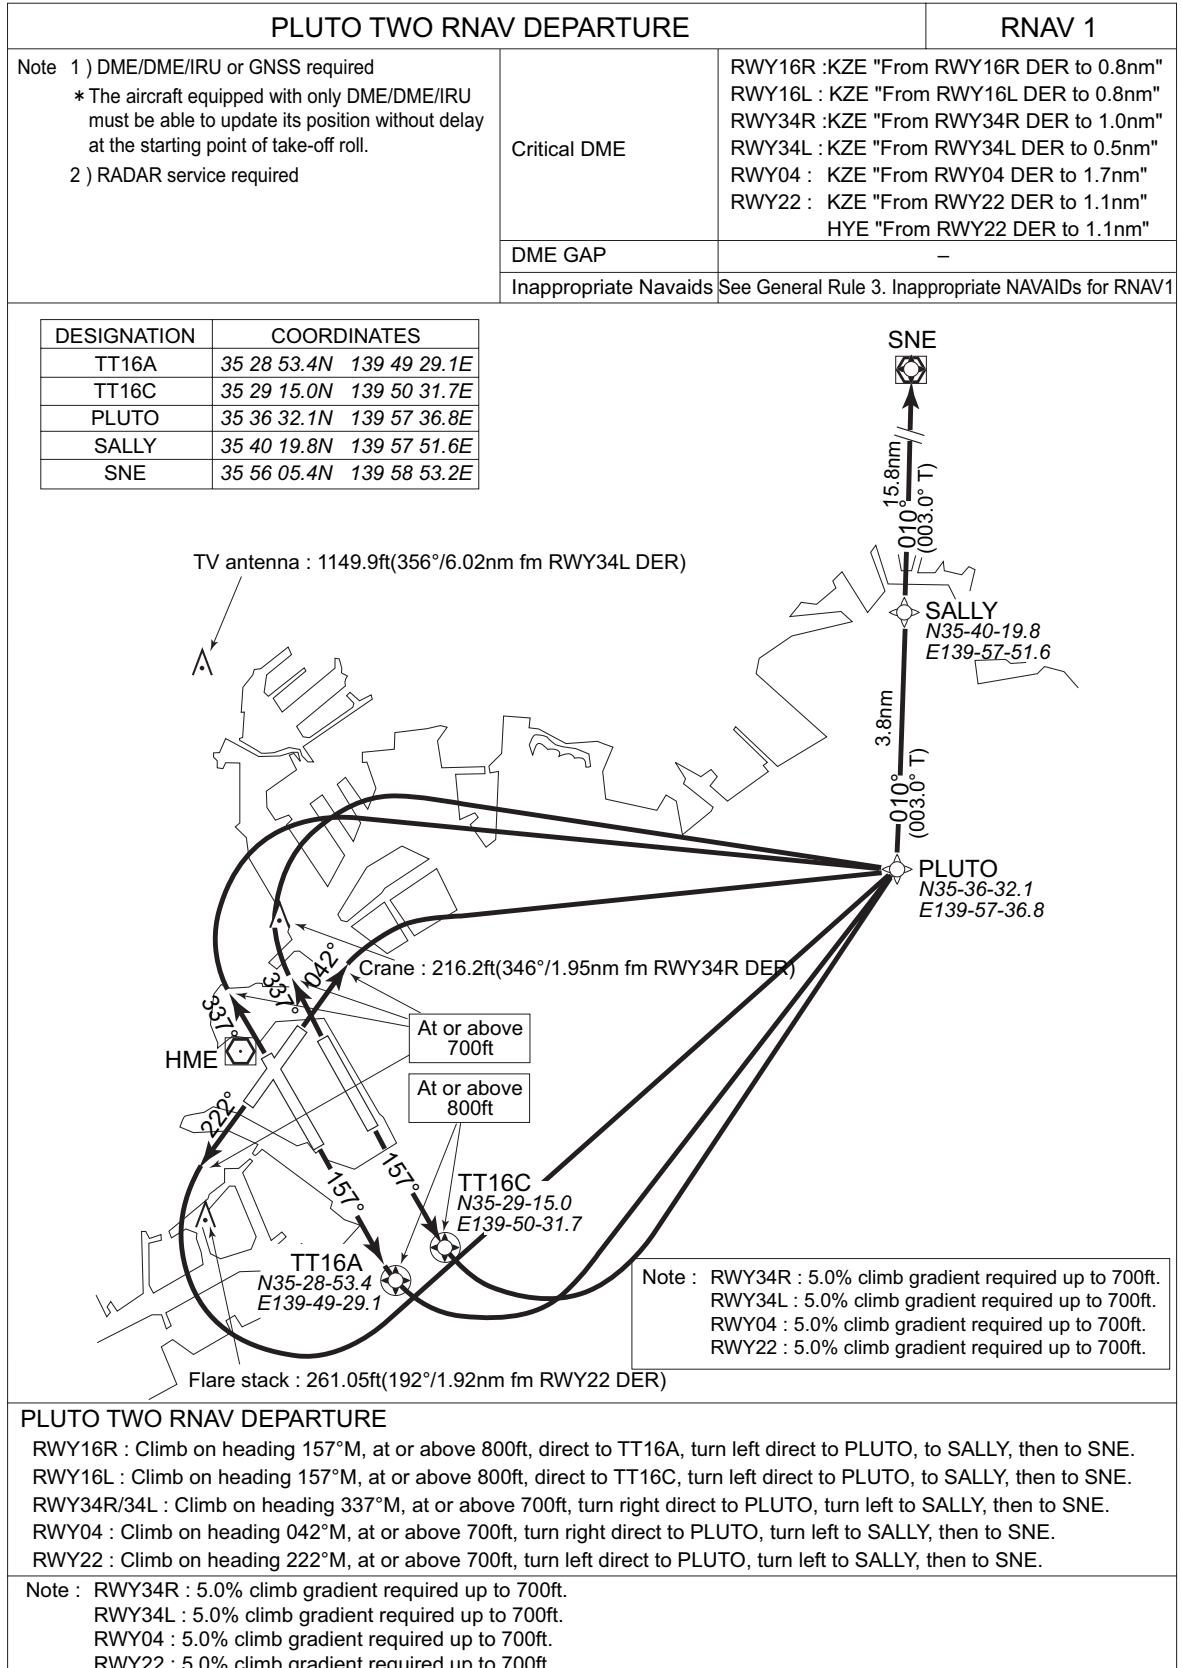

PLUTO TWO RNAV DEPARTURE

RWY16R : Climb on heading 157°M, at or above 800ft, direct to TT16A, turn left direct to PLUTO, to SALLY, then to SNE.
RWY16L : Climb on heading 157°M, at or above 800ft, direct to TT16C, turn left direct to PLUTO, to SALLY, then to SNE.
RWY34R/34L : Climb on heading 337°M, at or above 700ft, turn right direct to PLUTO, turn left to SALLY, then to SNE.
RWY04 : Climb on heading 042°M, at or above 700ft, turn right direct to PLUTO, turn left to SALLY, then to SNE.
RWY22 : Climb on heading 222°M, at or above 700ft, turn left direct to PLUTO, turn left to SALLY, then to SNE.

Note : RWY34R : 5.0% climb gradient required up to 700ft.
RWY34L : 5.0% climb gradient required up to 700ft.
RWY04 : 5.0% climb gradient required up to 700ft.
RWY22 : 5.0% climb gradient required up to 700ft.

RJTT / TOKYO INTL

RNAV SID

PLUTO TWO RNAV DEPARTURE

RWY16R

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (kt)	Vertical Angle	Navigation Performance
VA	—	—	—	157° (149.9°)	—	800	—	—	RNAV1
DF	TT16A	Y	—	—	—	—	—	—	RNAV1
DF	PLUTO	—	—	—	L	—	—	—	RNAV1
TF	SALLY	—	3.8	010° (003.0°)	—	—	—	—	RNAV1
TF	SNE	—	15.8	010° (003.0°)	—	—	—	—	RNAV1

RWY16L

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (kt)	Vertical Angle	Navigation Performance
VA	—	—	—	157° (149.9°)	—	800	—	—	RNAV1
DF	TT16C	Y	—	—	—	—	—	—	RNAV1
DF	PLUTO	—	—	—	L	—	—	—	RNAV1
TF	SALLY	—	3.8	010° (003.0°)	—	—	—	—	RNAV1
TF	SNE	—	15.8	010° (003.0°)	—	—	—	—	RNAV1

RWY34R/34L

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (kt)	Vertical Angle	Navigation Performance
VA	—	—	—	337° (329.9°)	—	700	—	—	RNAV1
DF	PLUTO	—	—	—	R	—	—	—	RNAV1
TF	SALLY	—	3.8	010° (003.0°)	—	—	—	—	RNAV1
TF	SNE	—	15.8	010° (003.0°)	—	—	—	—	RNAV1

Note : RWY34R : 5.0% climb gradient required up to 700ft.
RWY34L : 5.0% climb gradient required up to 700ft.

RJTT/TOKYO INTL

RNAV SID

RWY04

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (kt)	Vertical Angle	Navigation Performance
VA	—	—	—	042° (035.0°)	—	700	—	—	RNAV1
DF	PLUTO	—	—	—	R	—	—	—	RNAV1
TF	SALLY	—	3.8	010° (003.0°)	—	—	—	—	RNAV1
TF	SNE	—	15.8	010° (003.0°)	—	—	—	—	RNAV1

Note : RWY 04 : 5.0% climb gradient required up to 700ft.

RWY22

Rcmd. Path Terminator	Fix ID (Waypoint Name)	Fly Over	Distance (NM)	MAG Track (TRUE Track)	Turn Direction	Altitude (FT)	Speed Limit (kt)	Vertical Angle	Navigation Performance
VA	—	—	—	222° (215.0°)	—	700	—	—	RNAV1
DF	PLUTO	—	—	—	L	—	—	—	RNAV1
TF	SALLY	—	3.8	010° (003.0°)	—	—	—	—	RNAV1
TF	SNE	—	15.8	010° (003.0°)	—	—	—	—	RNAV1

Note : 5.0% climb gradient required up to 700ft.