


AERODROME GROUND MOVEMENT  
AND AIRCRAFT PARKING CHART - ICAO

TOWER 118.3

NALCHIK, RUSSIA

NALCHIK

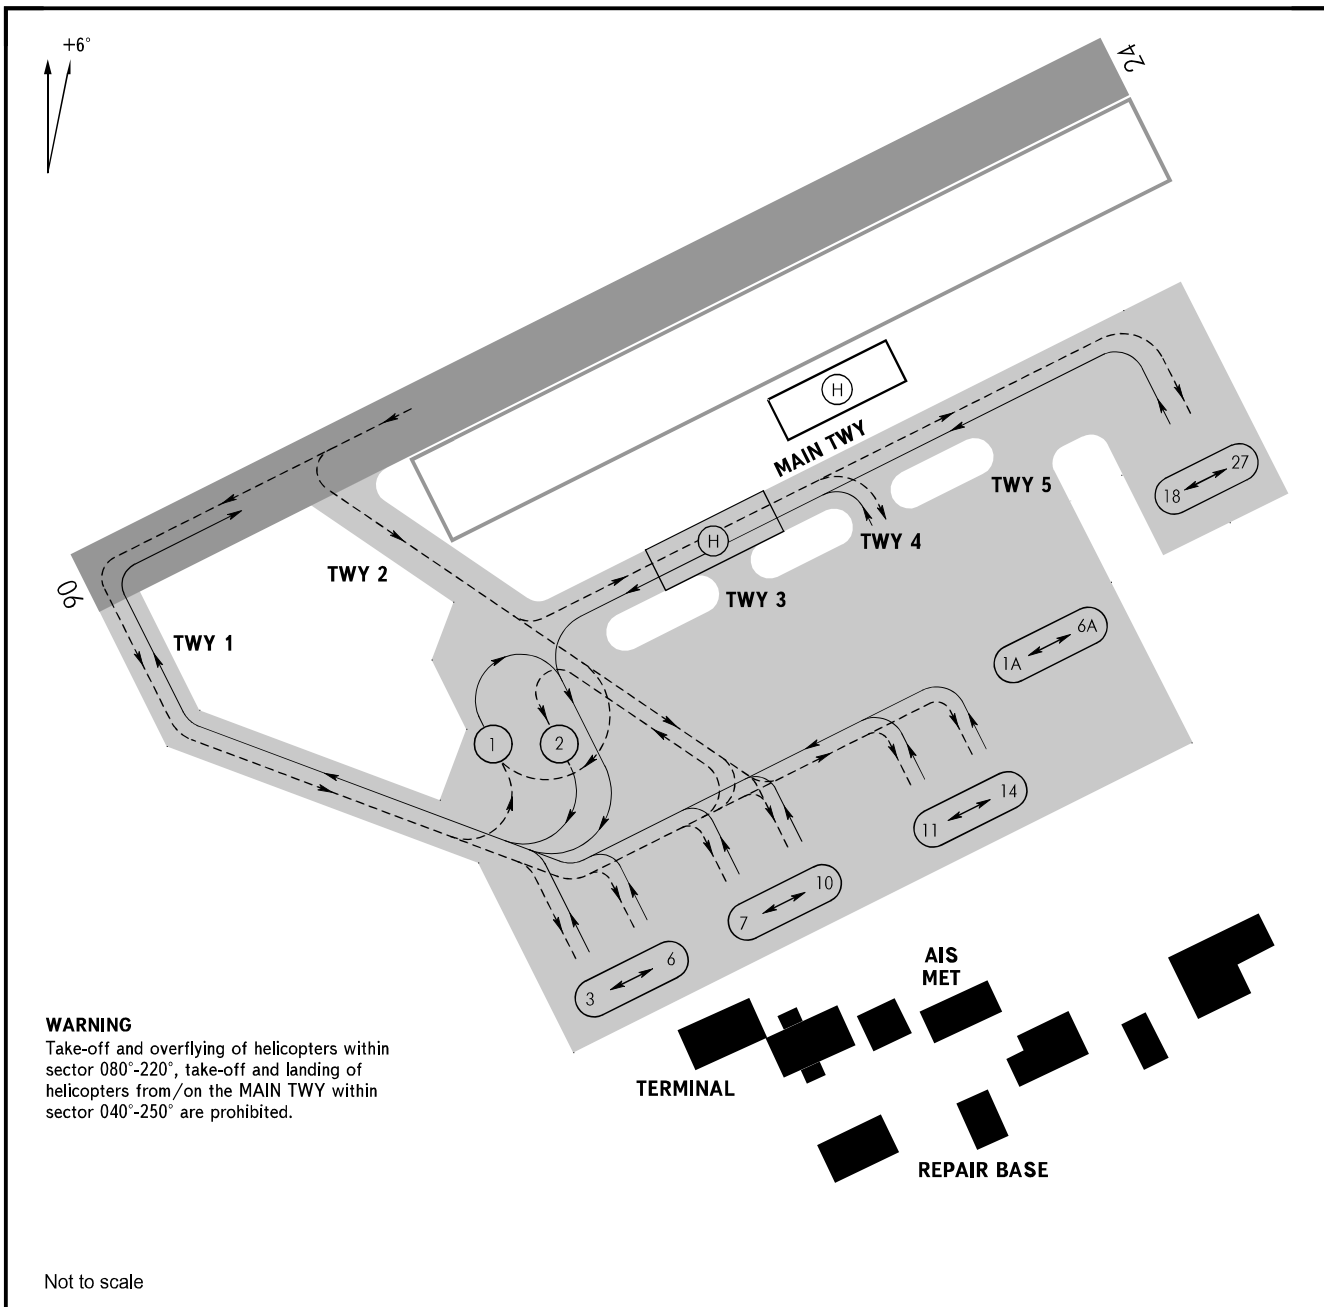

**WARNING**

Take-off and overflying of helicopters within sector 080°-220°, take-off and landing of helicopters from/on the MAIN TWY within sector 040°-250° are prohibited.

Not to scale

**APRONS:**

Surface: - Asphalt-Concrete  
Stands strength: 1, 2 - PCN 21/F/C/X/T  
3-6 - PCN 28/F/C/X/T  
7-11 - PCN 38/F/C/X/T  
12-14 - PCN 24/F/C/X/T

**TAXIWAYS:**

Width: 1 - 21m  
2 - 16m  
MAIN TWY - 18m  
Surface: 1, 2, MAIN TWY - Asphalt-Concrete  
Strength: 1 - PCN 23/F/C/X/T  
2 - PCN 32/F/C/X/T  
MAIN TWY - PCN 21/F/C/Y/T

**WARNING:**

- During ACFT taxiing along TWY 1, TWY 2 the maximum radius of turn shall be 55m.
- All types ACFT shall taxi along TWY 1, TWY 2 at reduced speed strictly along the centre line; Il-18, An-12 ACFT shall taxi under inner engines power (B737-300, B737-500 - only along TWY 2)

**ACFT types:**

An-72  
An-26  
An-24  
An-12  
Il-18  
Tu-134  
Yak-42  
Yak-40  
Mi-8 HEL  
B737-300, B737-500

**STANDS:**

18-27  
1-14, 18-27  
1-14  
1-6, 11-14, 18-27  
1-6, 11-14  
1-6, 11-14  
1-6, 11-14  
1-7  
18-27  
7-11

CHANGE: WARNING-Stands B737-300,500