



INSTRUMENT
APPROACH
CHART-ICAO

VAR5° W AERODROME ELEV 4 RWY17L THR ELEV 3	
ATIS 127.85 D-ATIS 131.45	TWR 118.8(118.325) TWR 01 (17L/35R) 118.4(118.725) TWR 02 (16/34) 124.35(118.325) TWR 03 (17R/35L)
APP 120.3(119.75) AP01 (ZSSS) 125.4(119.75) AP02 125.85(119.20) AP03 123.8(119.20) AP04	126.65(128.05) AP05 126.3(120.65) AP06 121.1(124.05) AP07 127.75(124.05) AP08

ZSPD SHANGHAI/Pudong
RNAV CAT-II ILS RWY17L

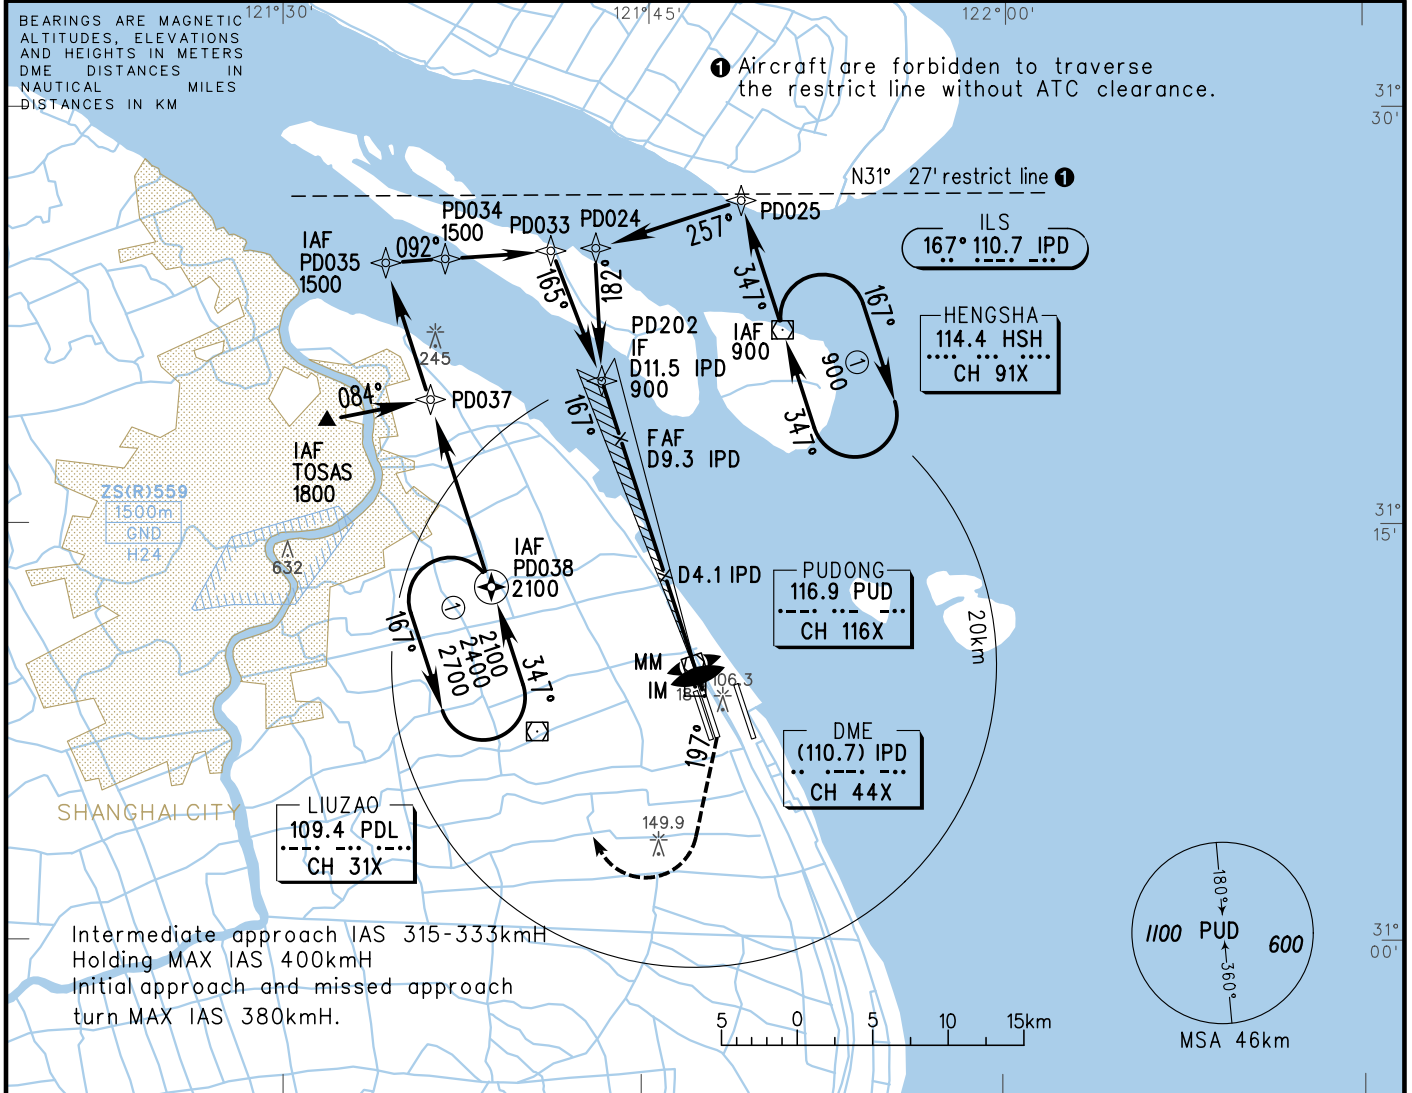

DME (IPD) (NM)	9	8	7	6	5	4	3	2	1
ALT (m)	874	777	680	583	486	389	292	195	98

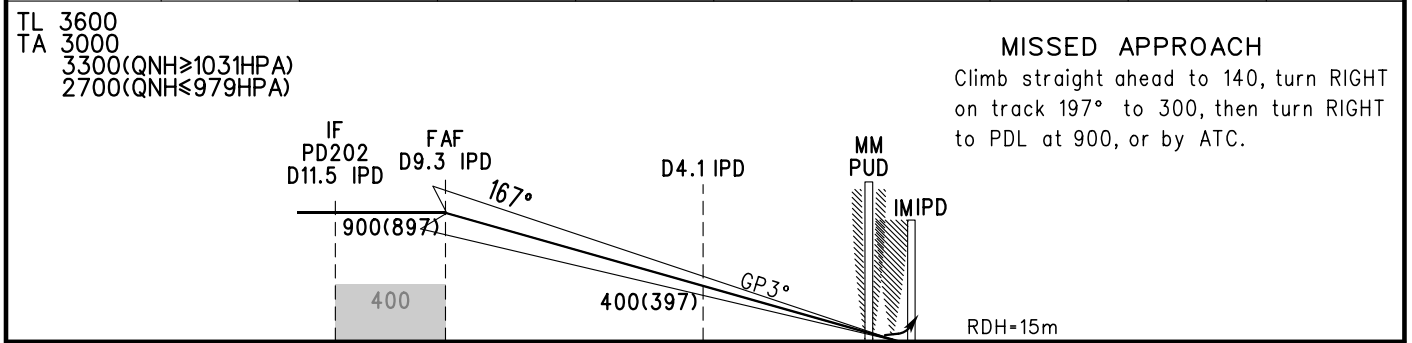

	A	B	C	D	FAF-THR 16.83km					
Radio altimeter RH	31				GS in	kt	80	100	120	140
Decision altitude DA(DH)	33(30)				kmH		150	220	260	295
Autopilot to DA and below	RVR350				Time	min:sec	6:49	5:27	4:33	3:54
Manual operation below DA	RVR400				Rate of descent	m/s	2.2	2.7	3.2	4.3

Changes: TWR FREQ.