
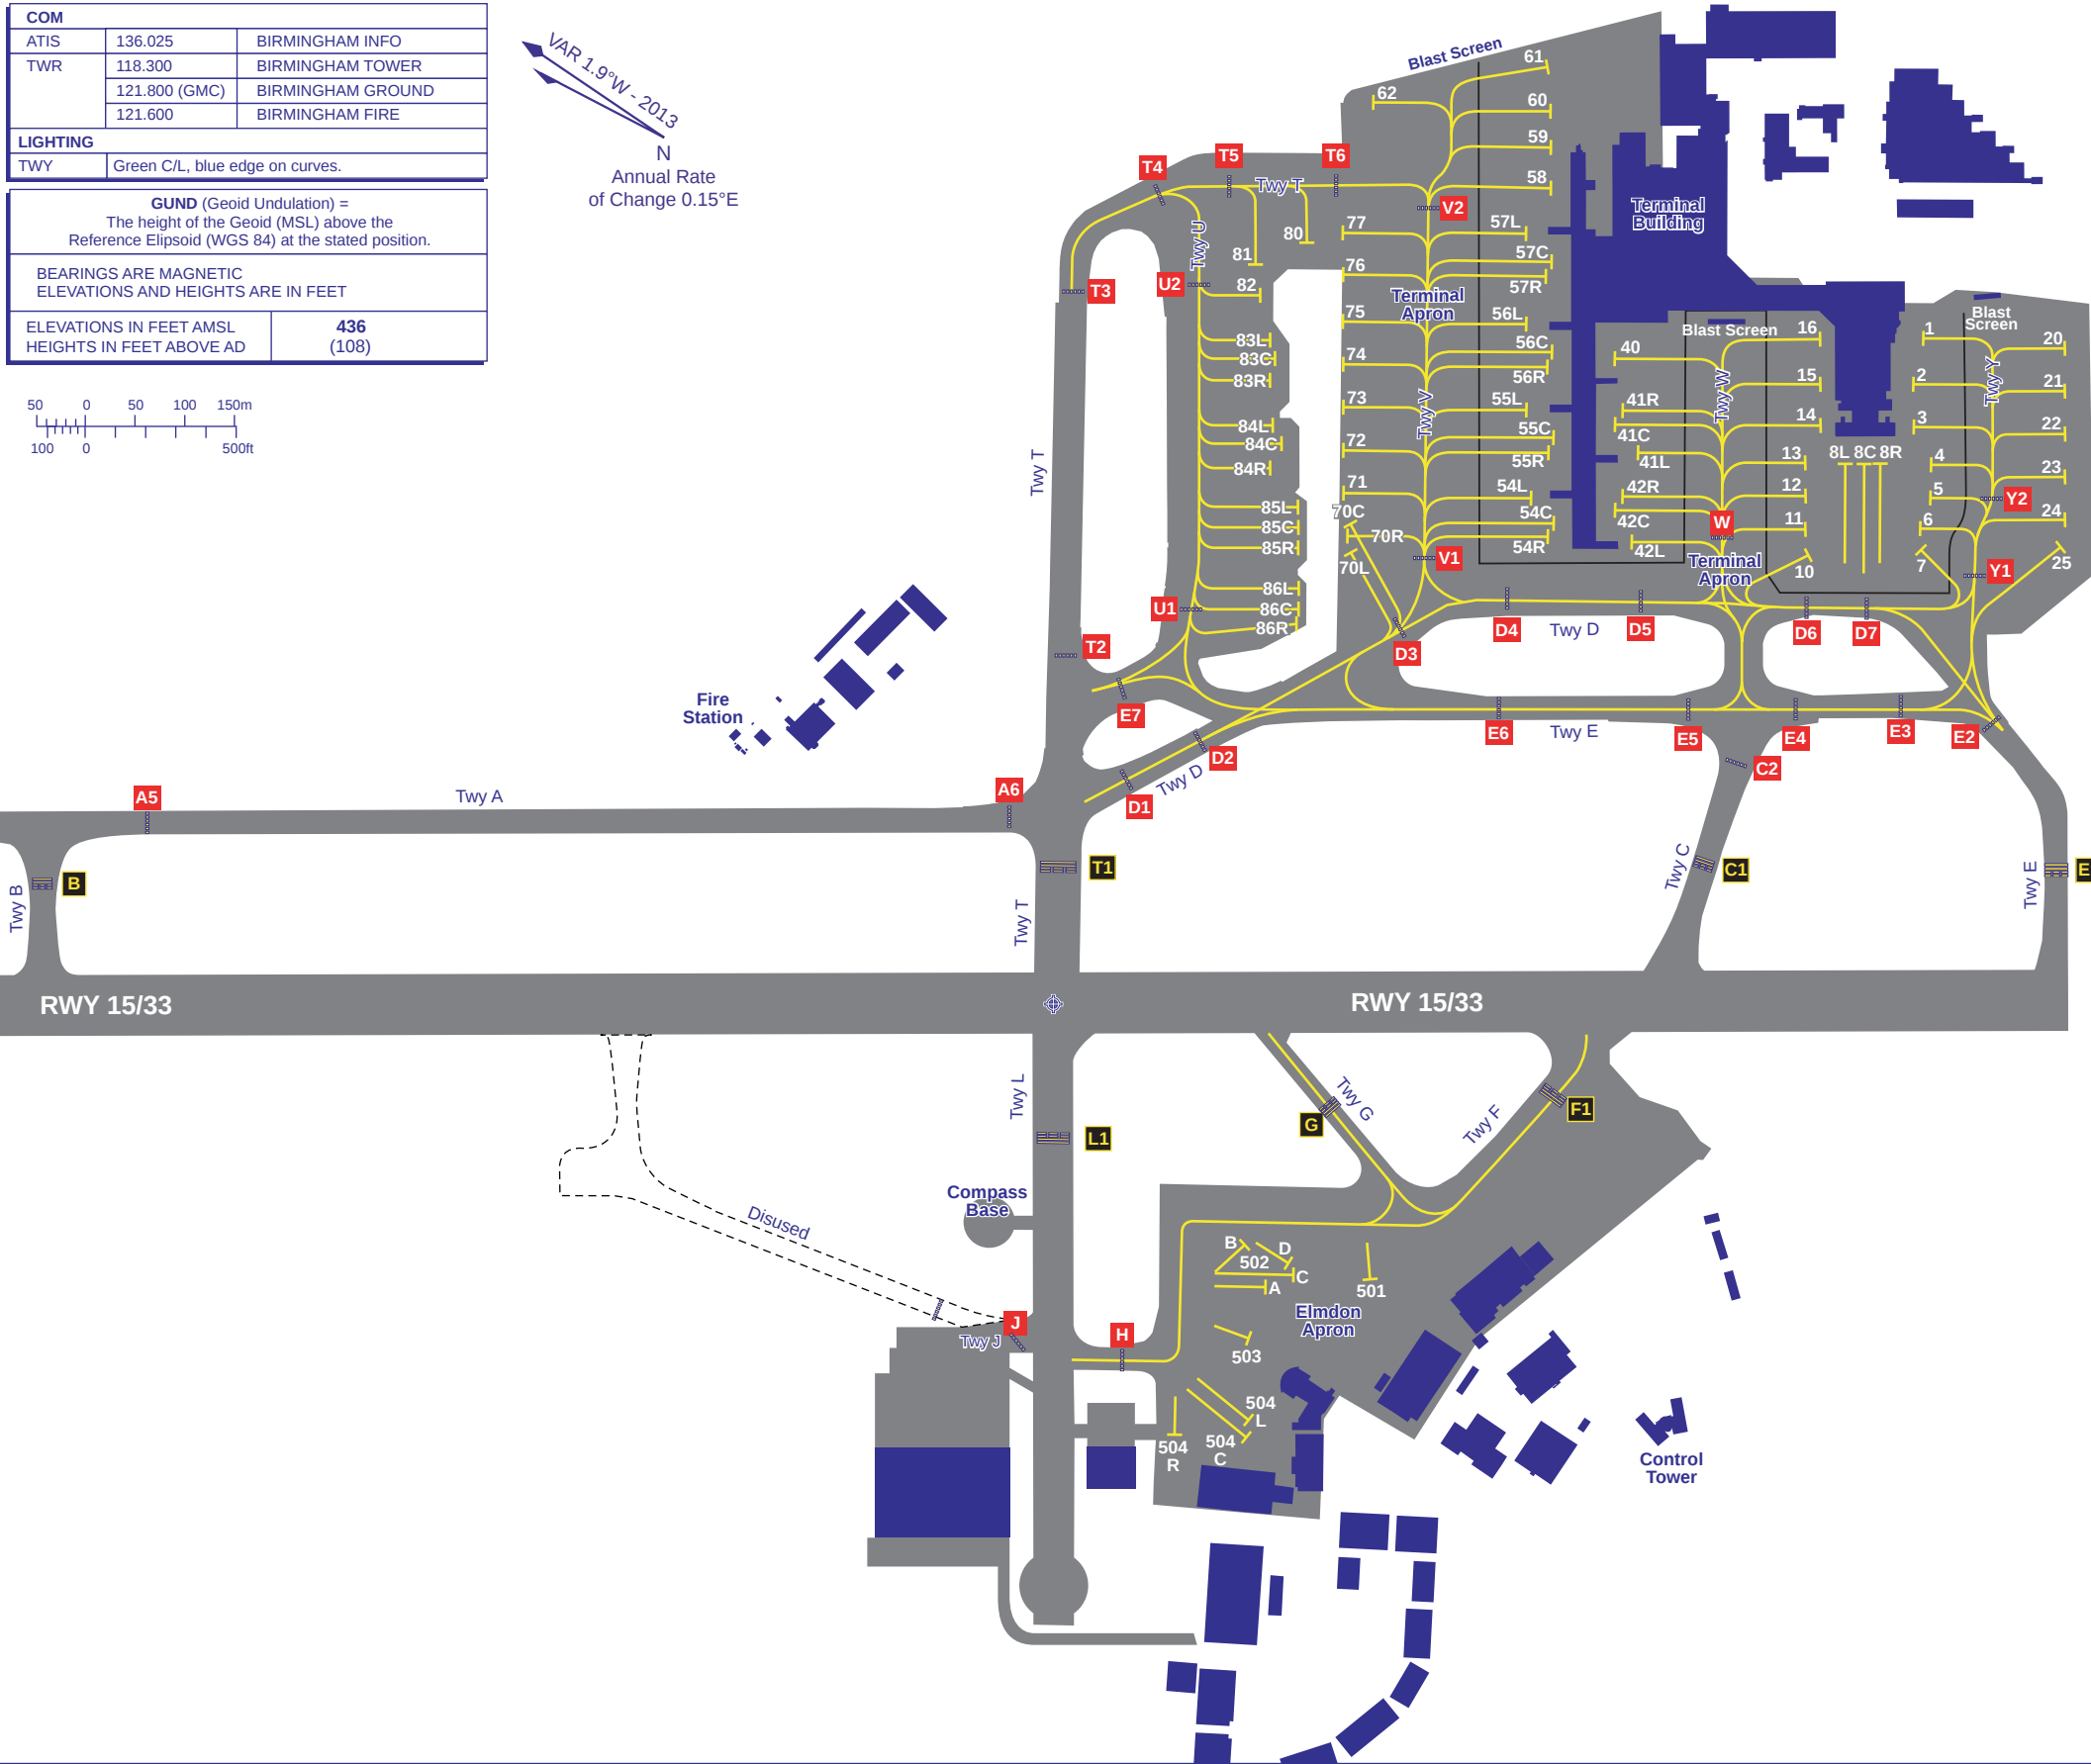



AIRCRAFT GROUND MOVEMENT/PARKING/DOCKING
CHART - ICAO

BIRMINGHAM
EGBB

COM		
ATIS	136.025	BIRMINGHAM INFO
TWR	118.300	BIRMINGHAM TOWER
	121.800 (GMC)	BIRMINGHAM GROUND
	121.600	BIRMINGHAM FIRE
LIGHTING		
TWY	Green C/L, blue edge on curves.	

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL	436
HEIGHTS IN FEET ABOVE AD	(108)



STAND	COORDINATES	STAND	COORDINATES
1	522702.63N 0014357.80W	58	522715.38N 0014402.27W
2	522702.06N 0014400.12W	59	522716.12N 0014400.47W
3	522701.28N 0014401.99W	60	522716.78N 0014358.89W
4	522700.13N 0014403.14W	61	522717.68N 0014357.04W
5	522659.55N 0014404.63W	62	522721.71N 0014403.77W
6	522659.26N 0014406.28W	70L	522714.15N 0014424.25W
7	522658.86N 0014407.20W	70C	522714.68N 0014423.02W
8L	522702.46N 0014405.65W	70R	522714.53N 0014423.62W
8C	522701.95N 0014405.09W	71	522715.42N 0014421.85W
8R	522701.53N 0014404.60W	72	522716.20N 0014419.97W
10	522701.80N 0014410.77W	73	522716.98N 0014418.09W
11	522702.34N 0014409.72W	74	522717.77N 0014416.20W
12	522702.95N 0014408.26W	75	522718.55N 0014414.32W
13	522703.55N 0014406.80W	76	522719.40N 0014412.25W
14	522703.82N 0014404.71W	77	522720.16N 0014410.42W
15	522704.58N 0014402.89W	80	522720.96N 0014411.91W
16	522705.39N 0014400.92W	81	522721.94N 0014414.39W
20	522658.66N 0014354.05W	82	522721.26N 0014415.61W
21	522657.87N 0014355.94W	83L	522720.17N 0014417.29W
22	522657.09N 0014357.82W	83C	522719.71N 0014417.97W
23	522656.31N 0014359.71W	83R	522719.40N 0014419.16W
24	522655.53N 0014401.59W	84L	522718.55N 0014420.96W
25	522655.15N 0014402.92W	84C	522717.99N 0014421.53W
40	522710.56N 0014407.87W	84R	522717.85N 0014422.92W
41C	522709.36N 0014410.76W	85L	522716.39N 0014423.81W
41L	522708.23N 0014411.34W	85C	522716.02N 0014424.71W
41R	522709.41N 0014409.93W	85R	522715.65N 0014425.60W
42C	522707.80N 0014414.52W	86L	522714.90N 0014427.40W
42L	522706.78N 0014415.44W	86C	522714.53N 0014428.30W
42R	522707.85N 0014413.70W	86R	522714.31N 0014429.01W
54C	522709.22N 0014416.94W	501	522701.17N 0014454.17W
54L	522710.29N 0014416.50W	502A	522703.09N 0014459.13W
54R	522709.14N 0014417.70W	502B	522704.42N 0014457.89W
55C	522710.78N 0014413.17W	502C	522702.57N 0014457.75W
55L	522712.01N 0014412.75W	502D	522702.93N 0014457.40W
55R	522710.64N 0014413.98W	503	522703.78N 0014502.30W
56C	522712.37N 0014409.44W	504C	522700.90N 0014506.29W
56L	522713.57N 0014408.98W	504L	522701.15N 0014505.46W
56R	522712.23N 0014410.24W	504R	522702.87N 0014508.29W
57C	522714.02N 0014405.47W		
57L	522715.22N 0014405.00W		
57R	522713.91N 0014406.30W		

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 15/33	Grooved Asphalt	65/F/B/W/T	-
Terminal Apron	Concrete	75/R/B/W/T	17ft amsl
Elmdon	Asphalt/Concrete	25/F/C/X/T(A) & 30/R/C/W/T(C)	-
Twy A/B/C/D/E/V/W/Y	Concrete	75/R/B/W/T	-
Twy F	Concrete	30/R/C/W/T	-
Twy T/U	Concrete	53/R/C/W/T	-
Twy G	Asphalt	25/F/C/W/T	-
Twy J	Asphalt	83/F/B/W/T	-

CHANGE (11/13): NEW HANGAR/APRON WEST OF ELMDON APRON. TAXIWAY K REDESIGNATED AS DISUSED. HOLDS K1/K2 REMOVED. HOLD J/TWY J ADDED. CHARACTERISTICS BOX AMENDED.