


INSTRUMENT APPROACH CHART - ICAO

LONDON/HEATHROW

RNAV(GNSS)  
RWY 09R


(ACFT CAT A,B,C,D)

<p>MSA 25NM ARP</p>	APP 119.725, 120.400, 127.525, 134.975	HEATHROW DIRECTOR	AD ELEVATION	83
	TWR 118.500, 118.700, 124.475	HEATHROW TOWER	THR ELEVATION	75
	RAD 125.625, 127.525	HEATHROW RADAR	OBSTACLE ELEVATION	1087 AMSL (1012) (ABOVE THR)
	ATIS 128.075, 113.750, 115.100	HEATHROW INFORMATION	BEARINGS ARE MAGNETIC	MIN TEMP -10°C
			TRANSITION ALTITUDE	6000

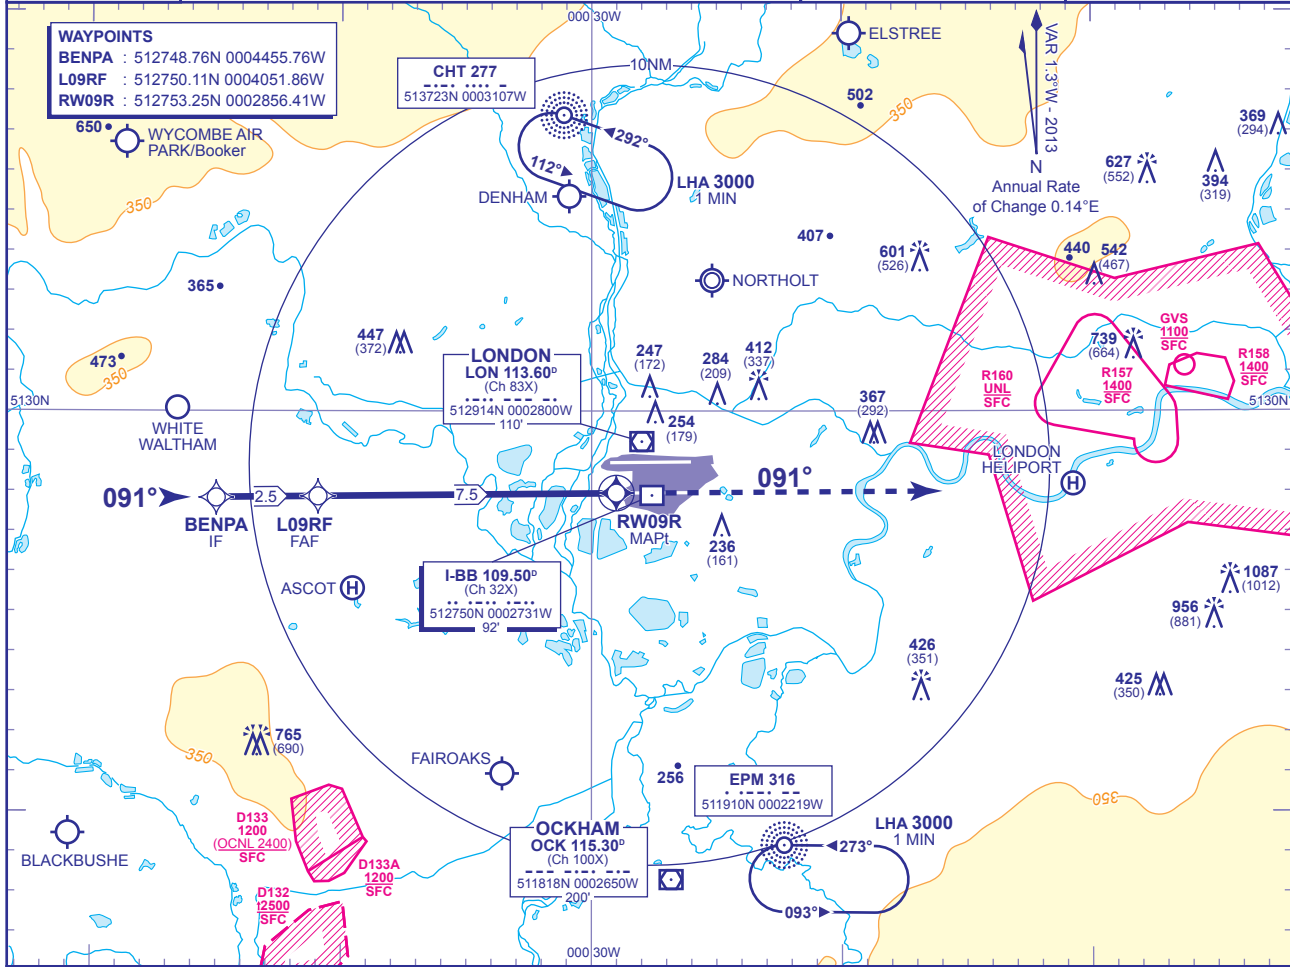

RECOMMENDED PROFILE VERTICAL PATH ANGLE 3.0° (LNAV 5.24%), 318FT/NM

NM to RW09R	7	6	5	4	3	2
ALT(HGT)	2360(2285)	2040(1965)	1720(1645)	1400(1325)	1090(1015)	770(695)

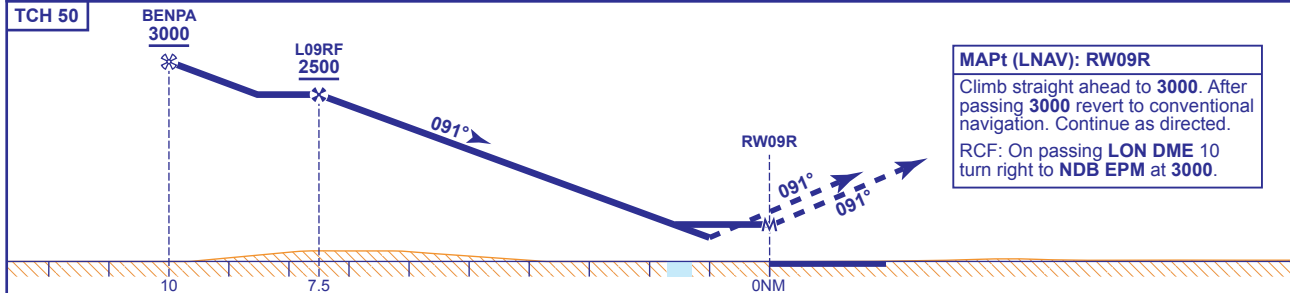

Aircraft Category	A	B	C	D	Rate of descent	G/S KT	160	140	120	100	80
	LNAV/VNAV	500(425)	500(425)	500(425)		500(425)	FT/MIN	850	740	640	530
OCA (OCH)	LNAV	630(555)	630(555)	630(555)	630(555)						
VM(C)OCA (OCH AAL)	Total Area	750(667)	750(667)	850(767)	850(767)						

- NOTES
- 1 Pilots should 'Request RNAV Approach' on first contact with Heathrow Director.
  - 2 Aircraft will normally be radar vectored from the STAR Holding/Initial Approach Fixes.
  - 3 Missed Approach Procedure uses conventional navigation aids and is not available without DME LON and NDB EPM.

CHANGE (10/13): MAG VAR. CORRECTION TO PROFILE.

AERO INFO DATE 02 JUL 13