
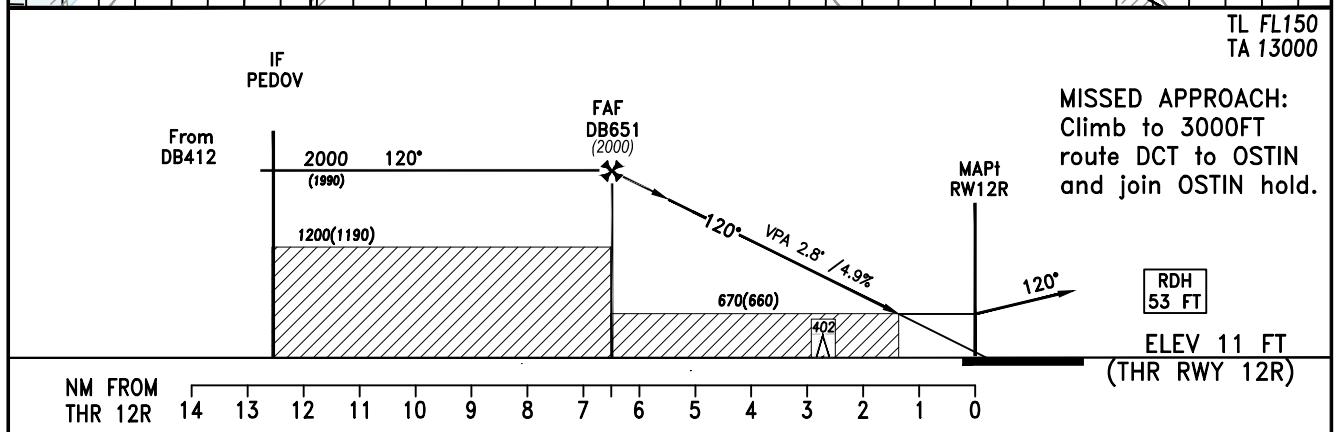


INSTRUMENT APPROACH CHART-ICAO

AD ELEV 62 FT
HEIGHTS RELATED TO THR RWY 12R ELEV 11FT
MNM TEMP FOR VNAV 5°C

ATIS 131.70
APPROACH 124.90
DIRECTOR 127.90
TOWER 118.75/119.55
GROUND 118.35

DUBAI / Intl.
RNAV(GNSS) RWY 12R
CAT A - D_L

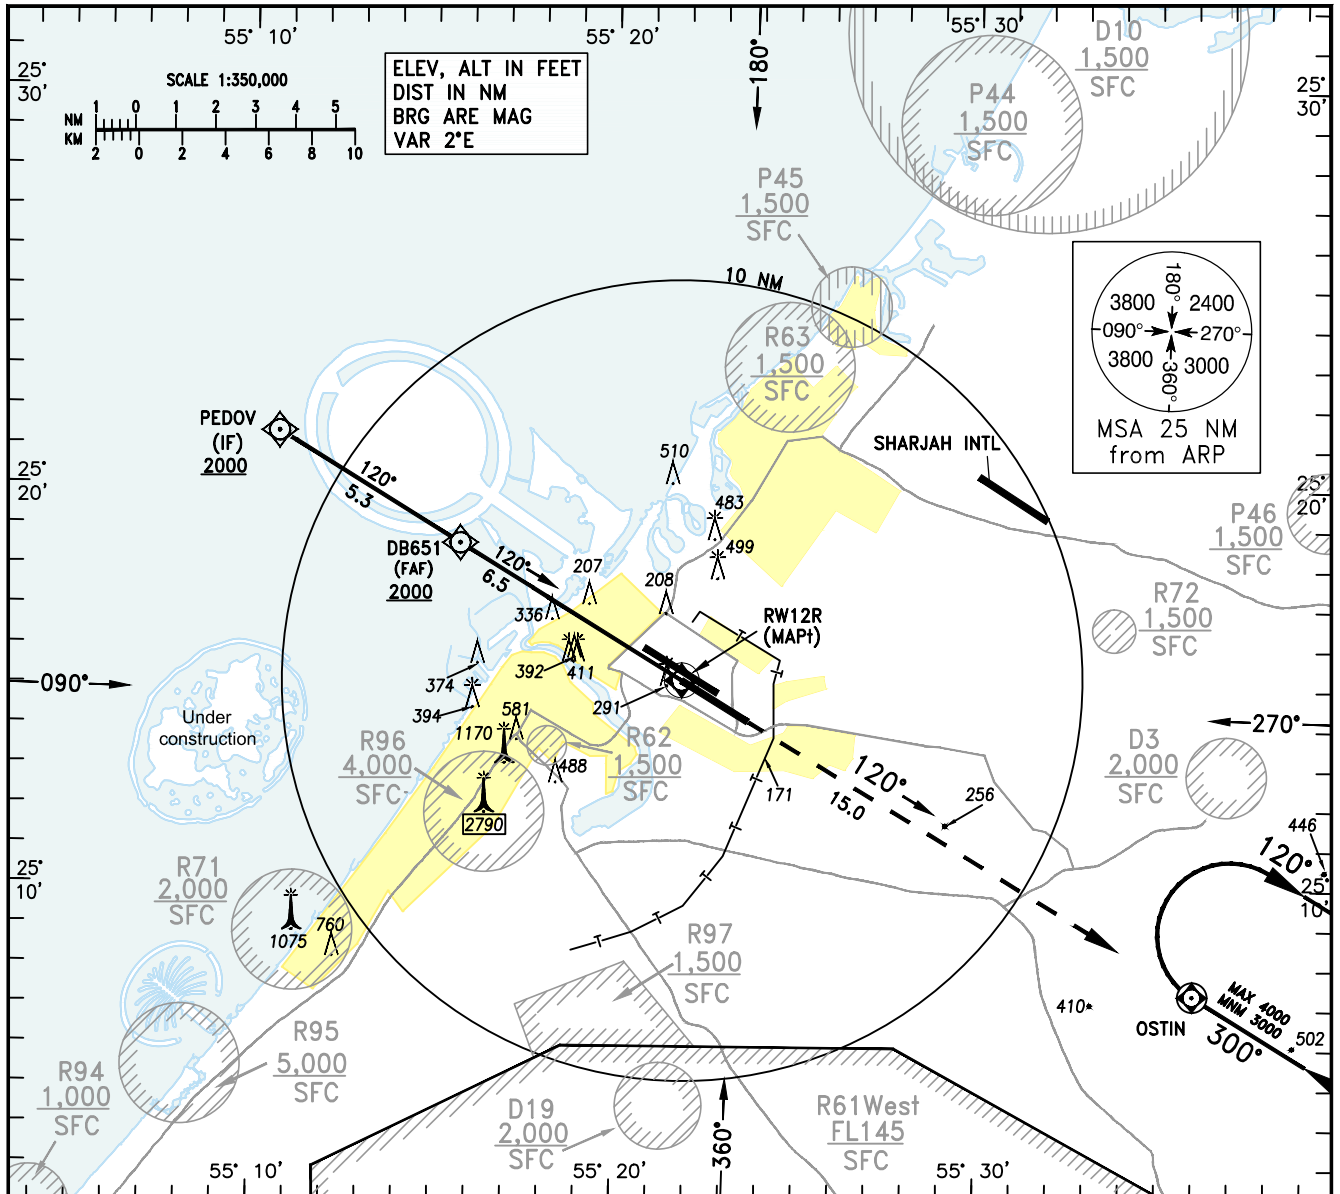

| | | OCA/H | A | B | C | D | D _L | | |
|----------------------|-----------|----------------------|-----------|-----------|-----------|-----------|----------------|------|------|
| Straight-in Approach | LNAV/VNAV | | 410 (400) | 410 (400) | 420 (410) | 440 (430) | 440 (430) | | |
| | LNAV | | 670 (660) | 670 (660) | 670 (660) | 670 (660) | 670 (660) | | |
| Circling | | N/A | | | | | | | |
| | | Distance from RWY12R | NM | 2 | 3 | 4 | 5 | 6 | 7 |
| | | Altitude | FT | 660 | 960 | 1250 | 1550 | 1850 | 2000 |
| | | Ground Speed | KTS | 60 | 80 | 100 | 120 | 140 | 160 |
| | | Rate of Descent | FT/MIN | 300 | 400 | 500 | 590 | 690 | 790 |

CHANGES: Amended THR ELEV.