


AERODROME GROUND  
MOVEMENT CHART - ICAO

TOWER 118.5

KULOB, TAJIKISTAN

KULOB

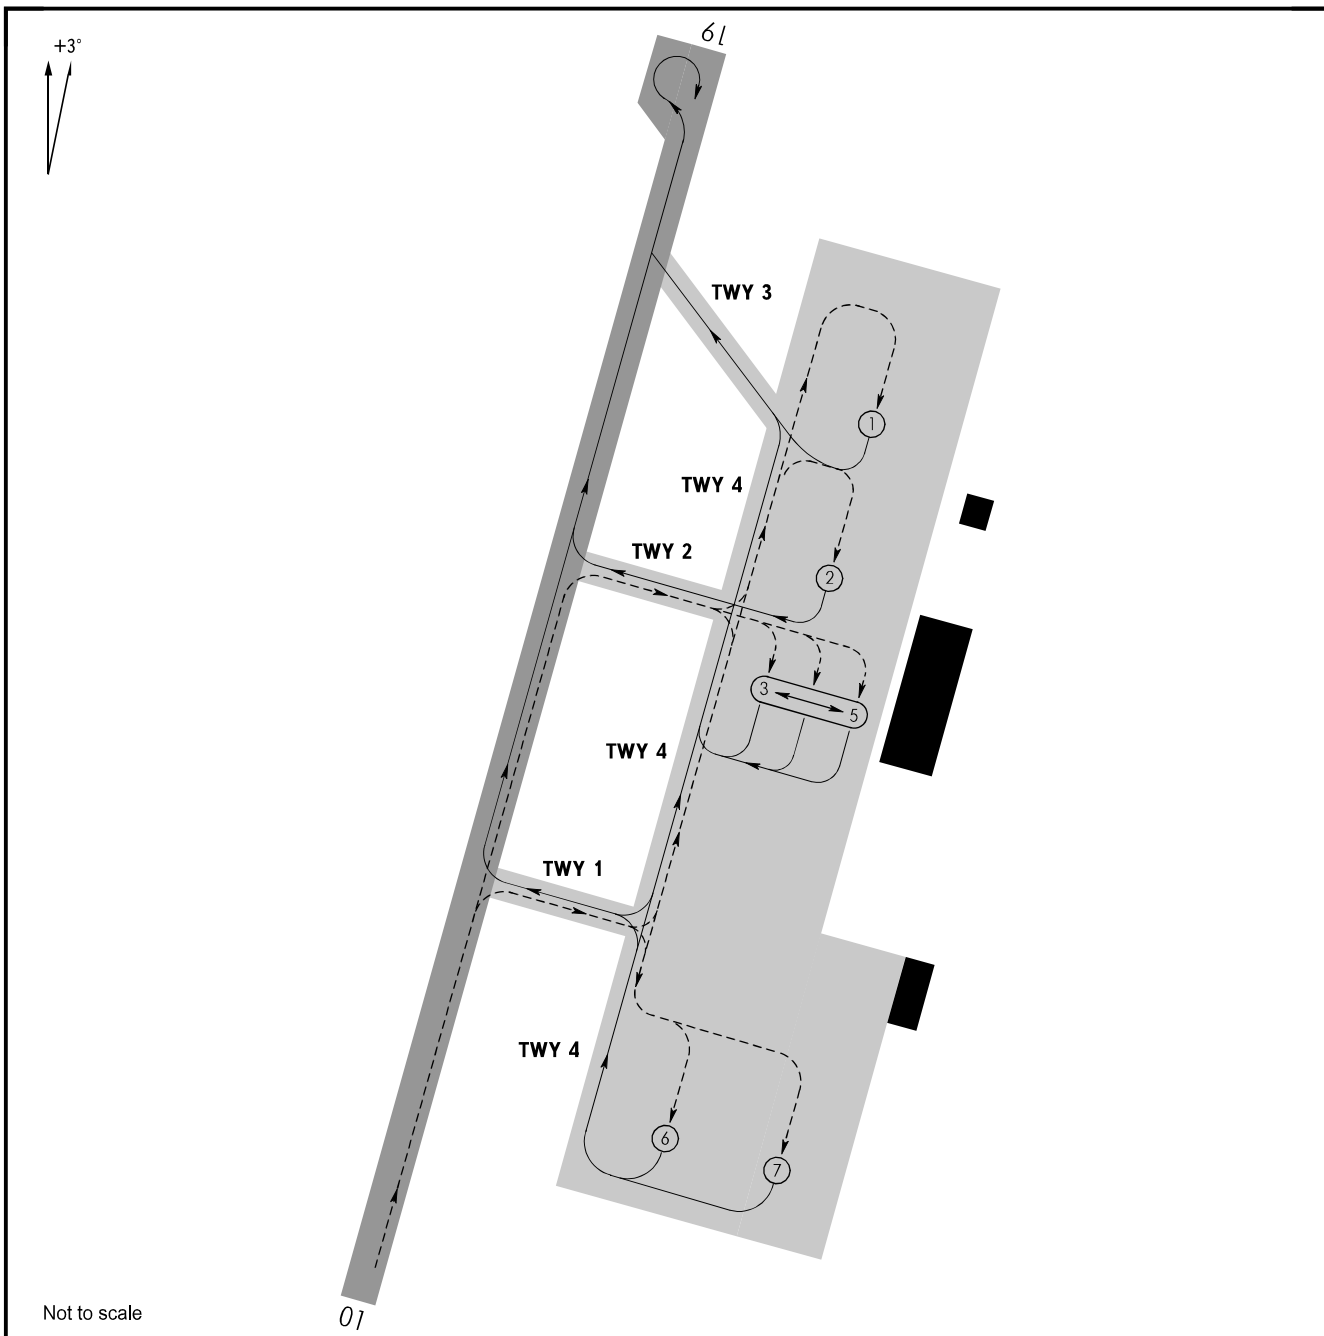

**APRON:** Passenger/cargo  
Surface: Asphalt-concrete  
Strength: PCN 41/F/B/X/T

**TAXIWAYS:**  
Width: 1 - 40.5m  
2, 3 - 29m  
4 - 29m, from TWY 1 to TWY 2  
- 21m, from TWY 2 to TWY 3  
Surface: 1, 2, 3, 4 - Asphalt  
Strength: 1 - PCN 35/F/B/X/T  
2 - PCN 41/F/B/X/T  
3 - PCN 35/F/B/X/T

**WARNING**  
After landing taxiing shall be carried out only along TWY 1 and TWY 2.  
TWY 3 is allowed to use for taxiing into RWY provided that taxiing is carried out strictly along the marking.

**STANDS:**  
1-2  
3-5  
6-7

**ACFT types:**  
- Tu-154, B737-400, Tu-134  
- Yak-40, An-24, An-26, An-30, An-32  
- Il-76