

STANDARD DEPARTURE CHART-INSTRUMENT

ZBAA BEIJING/Capital
 RNAV
 RWY36L/36R/01(CDY)

VAR6°W

BEARINGS ARE MAGNETIC ALTITUDES,ELEVATIONS AND HEIGHTS IN METERS DME DISTANCES IN NAUTICAL MILES DISTANCES IN KM


ATIS(DEP) 128.65

APP01 119.0(125.05) (HO)
 APP02 126.10(129.0) (HO)
 APP03 120.6(125.05) (H24)
 APP04 119.7(129.0) (HO)
 APP05 127.75(126.5) (HO)
 APP06 121.10(126.5) (HO)
 APP07 124.40(124.70)
 APP08 125.50(124.70)


TL 3600
 TA 3000
 3300(QNH>1031HPA)
 2700(QNH<979HPA)

- 1. RADAR REQUIRED
- 2. RNAV 1
- 3. GNSS,DME/DME/IRU REQUIRED

TWR01 124.3(118.3) 18R/36L
 TWR02 118.5(118.3) 18L/36R
 TWR03 118.05(118.6) 01/19

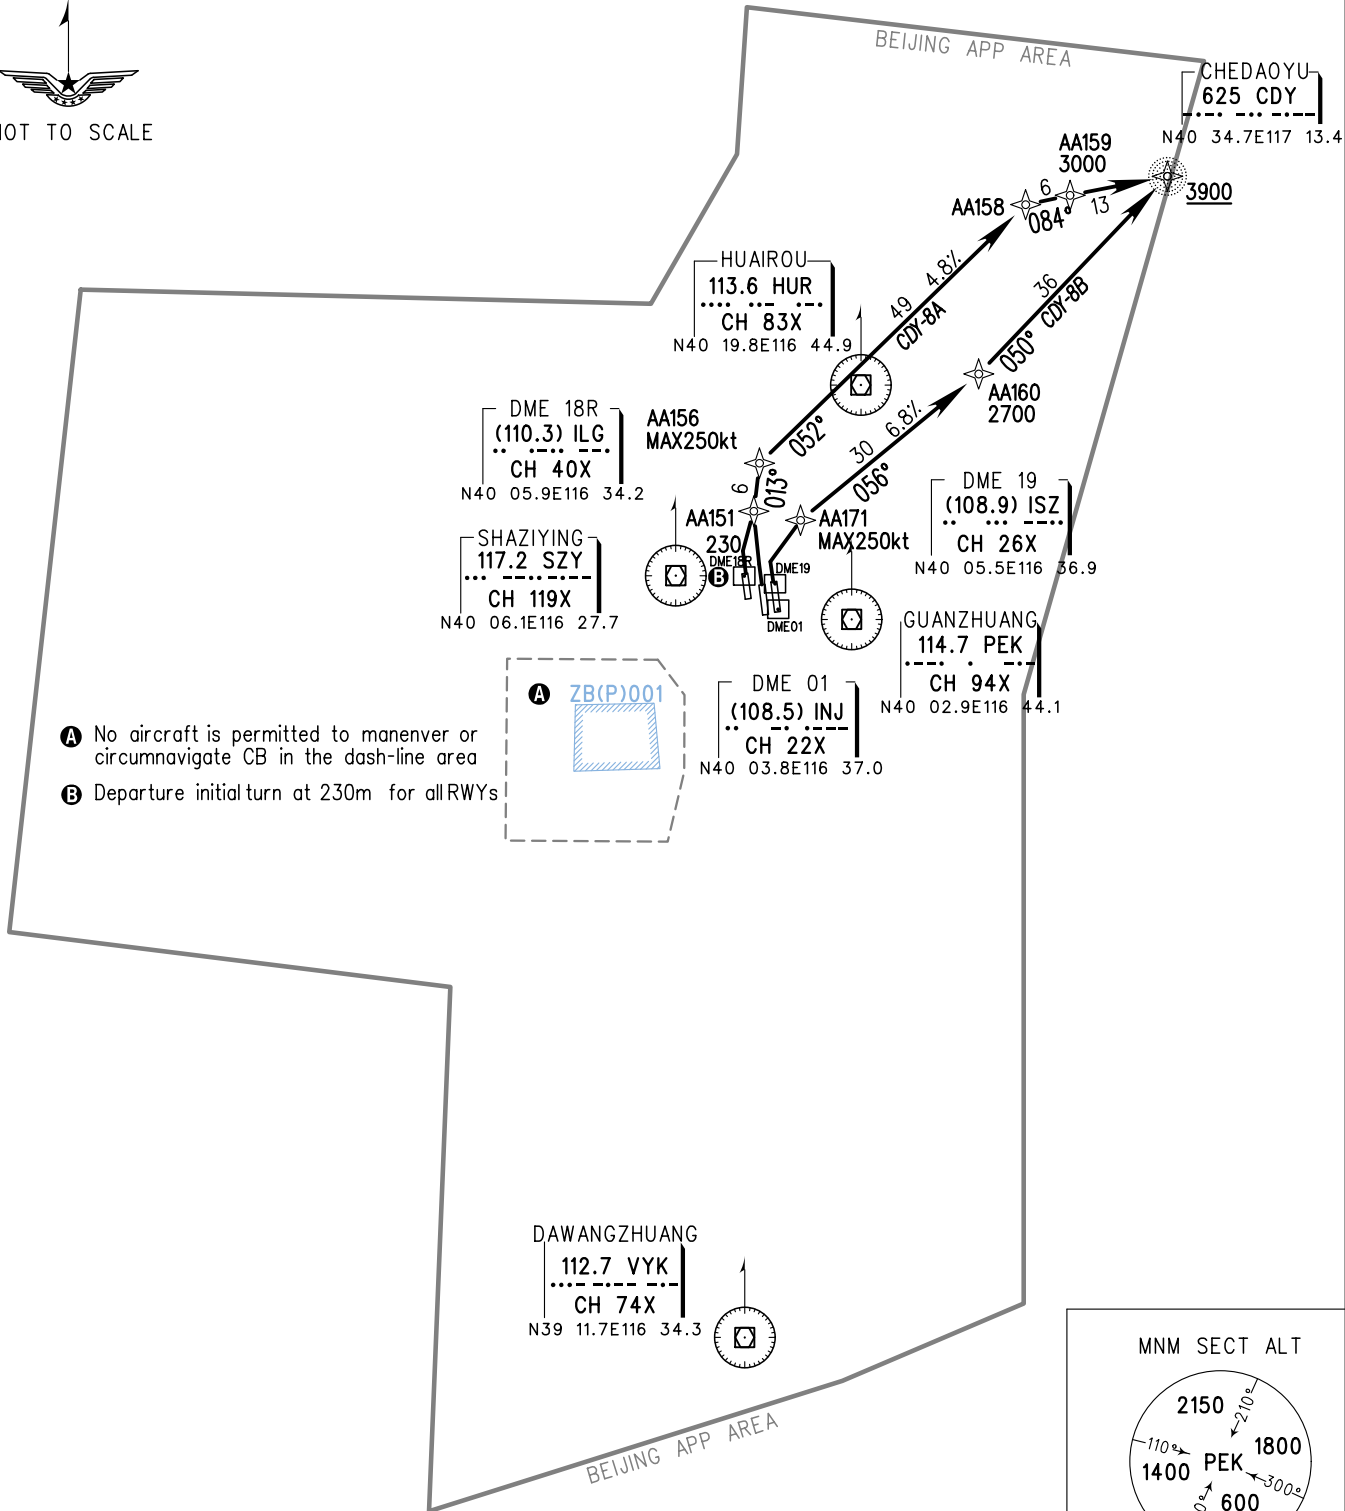

- A** No aircraft is permitted to manerver or circumnavigate CB in the dash-line area
- B** Departure initial turn at 230m for allRWYs



Changes: APP07, 08.