

D-ATIS 131.45  
 ATIS 127.45(departure) 126.85(arrival)  
 Zhuhai APP(R) TM01 120.35(127.95)  
 TM02 124.25(126.0)  
 TM03 123.85(126.0)  
 TM04 124.75(127.95)

**STANDARD DEPARTURE  
 CHART-INSTRUMENT**

VAR2° W

TWR 130.35(118.05)(E)  
 118.45(130.35)(W)


**ZGSZ SHENZHEN/Baoan**

RNAV RWY15


BEARINGS ARE MAGNETIC  
 ALTITUDES, ELEVATIONS  
 AND HEIGHTS IN METERS  
 DME DISTANCES IN  
 NAUTICAL MILES  
 DISTANCES IN KM

1. RADAR REQUIRED
2. RNAV 1
3. GNSS or DME/DME/IRU REQUIRED


TL 3600(QNH<980HPA)  
 3300(QNH>980HPA)  
 TA 2700



NOT TO SCALE

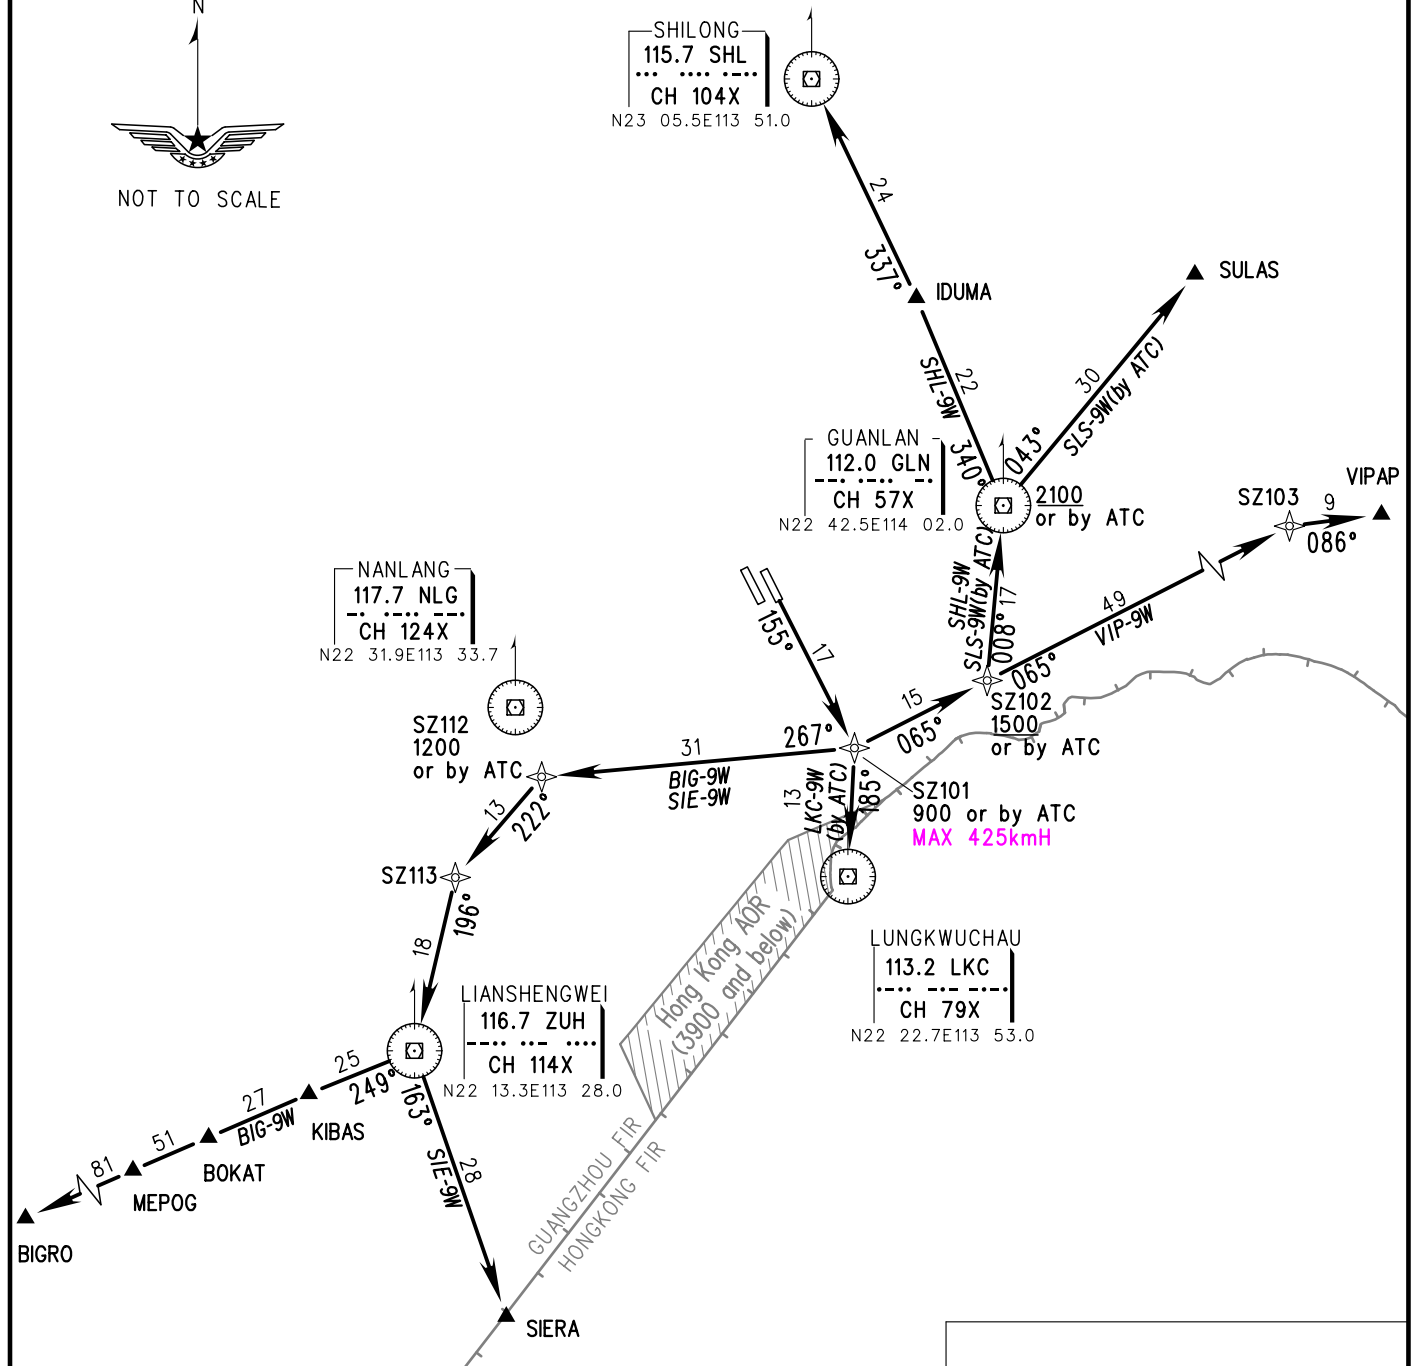

- Note:**
- ① Deviation to south of R065°SHK is forbidden.
  - ② Departure turn speed MAX IAS 425kmH.
  - ③ When two RWYs used for independent departure, BIG-9W, SIE-9W need ATC clearance.

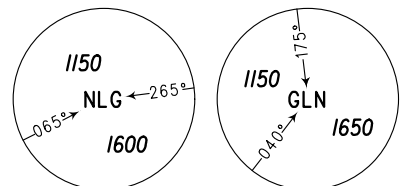

MSA 46km

MSA 46km

Changes: TWR FREQ, speed limit.