

D-ATIS 131.45
 ATIS 127.45(departure) 126.85(arrival)
 Zhuhai APP(R) TM01 120.35(127.95)
 TM02 124.25(126.0)
 TM03 123.85(126.0)
 TM04 124.75(127.95)

**STANDARD DEPARTURE
 CHART-INSTRUMENT**

VAR2° W


TWR 130.35(118.05)(E)
 118.45(130.35)(W)

ZGSZ SHENZHEN/Baoan

RWY16

TL 3600(QNH<980HPA)
 3300(QNH>980HPA)
 TA 2700

BEARINGS ARE MAGNETIC
 ALTITUDES, ELEVATIONS
 AND HEIGHTS IN METERS
 DME DISTANCES IN
 NAUTICAL MILES
 DISTANCES IN KM

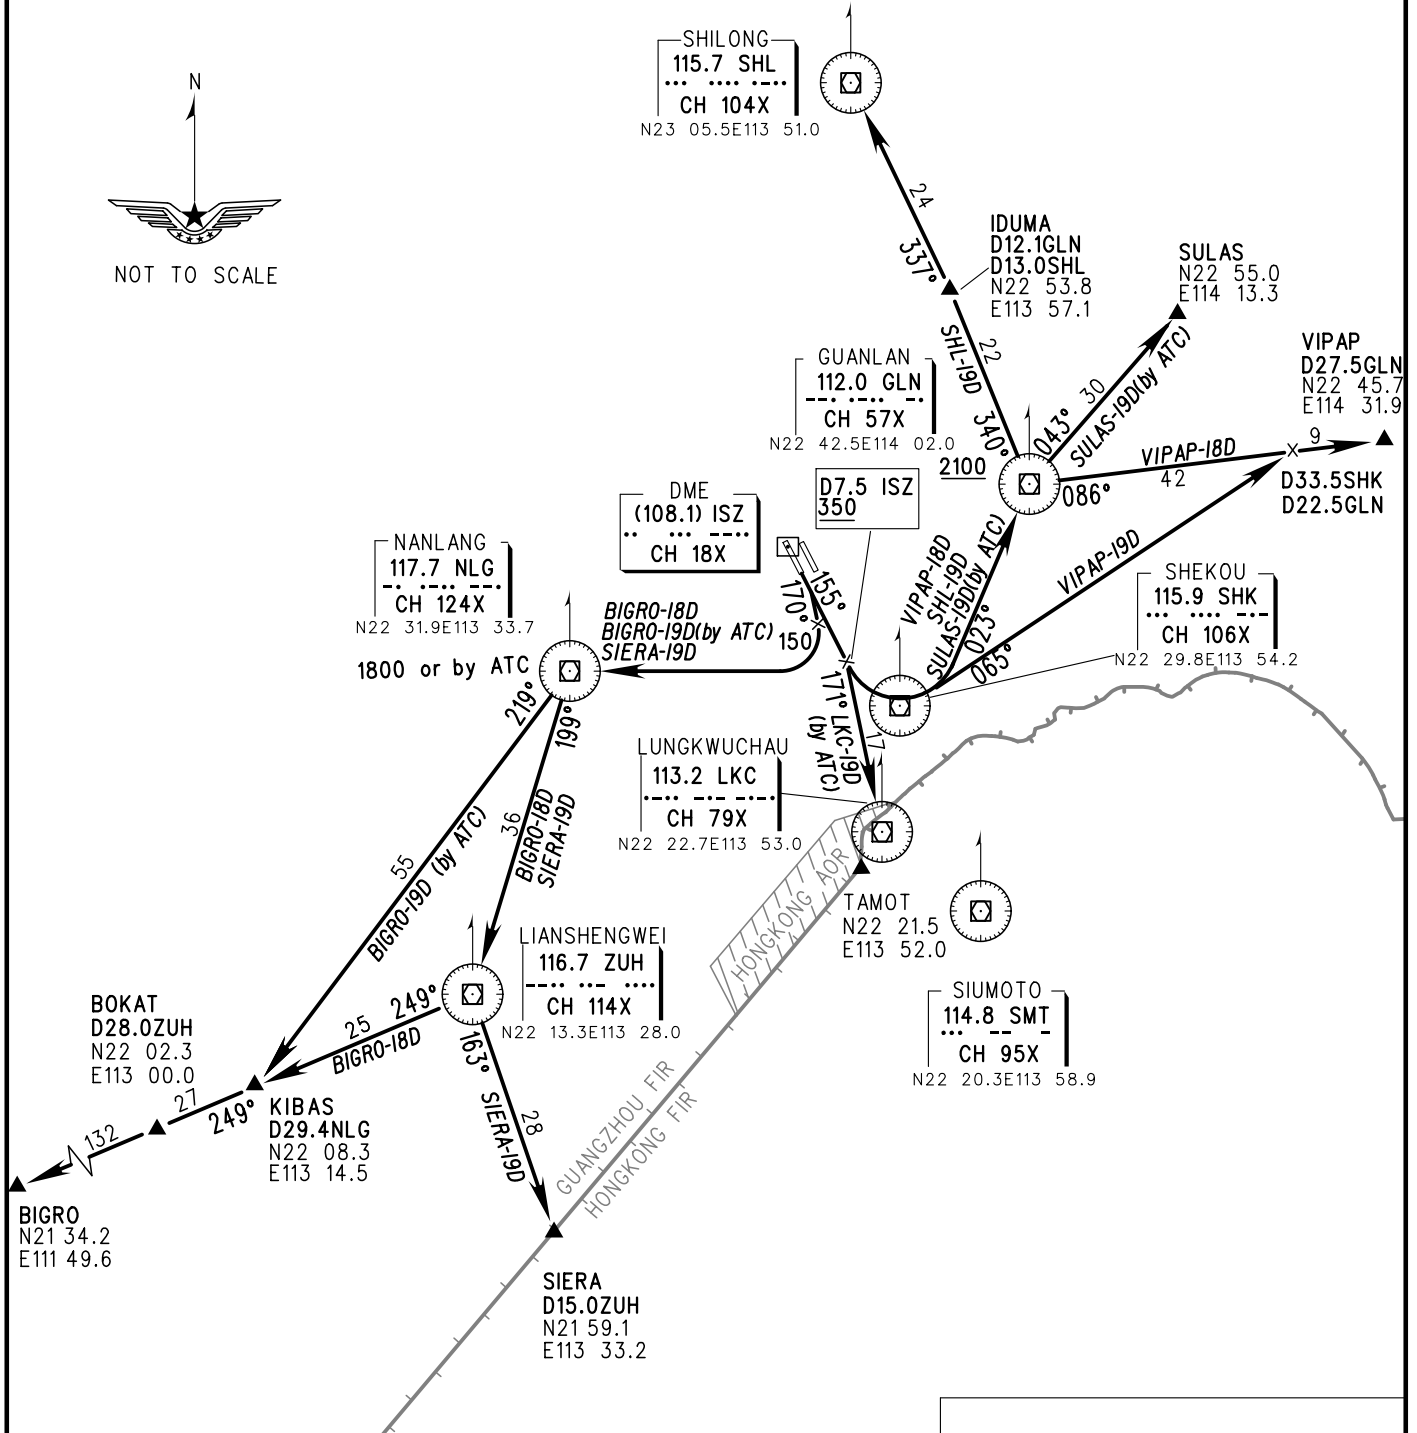

- Note:**
- ① Deviation to south of R065° SHK is forbidden.
 - ② Departure turn speed MAX IAS 425kmH.
 - ③ When two RWYs used for independent departure, SHL-19D, VIPAP-18D, VIPAP-19D, LKC-19D need ATC clearance.

Changes: TWR FREQ.

