D-ATIS 131.45
ATIS 127.45(departure) 126.85(arrival)
Zhuhai APP(R) TM01 120.35(127.95)
TM02 124.25(126.0)
TM03 123.85(126.0)
TM04 124.75(127.95)
TWR 130.35(118.05)(E)
118.45(130.35)(W)

STANDARD ARRIVAL CHART-INSTRUMENT

VAR2° W

ZGSZ SHENZHEN/Baoan

RNAV RWY33

BEARINGS ARE MAGNETIC
ALTITUDES, ELEVATIONS AND HEIGHTS IN METERS
DME DISTANCES IN NAUTICAL MILES
DISTANCES IN KM

1. RADAR REQUIRED
2. RNAV 1
3. GNSS or DME/DME/IRU REQUIRED

TL 3600(QNH<980HPA)
3300(QNH≥980HPA)
TA 2700

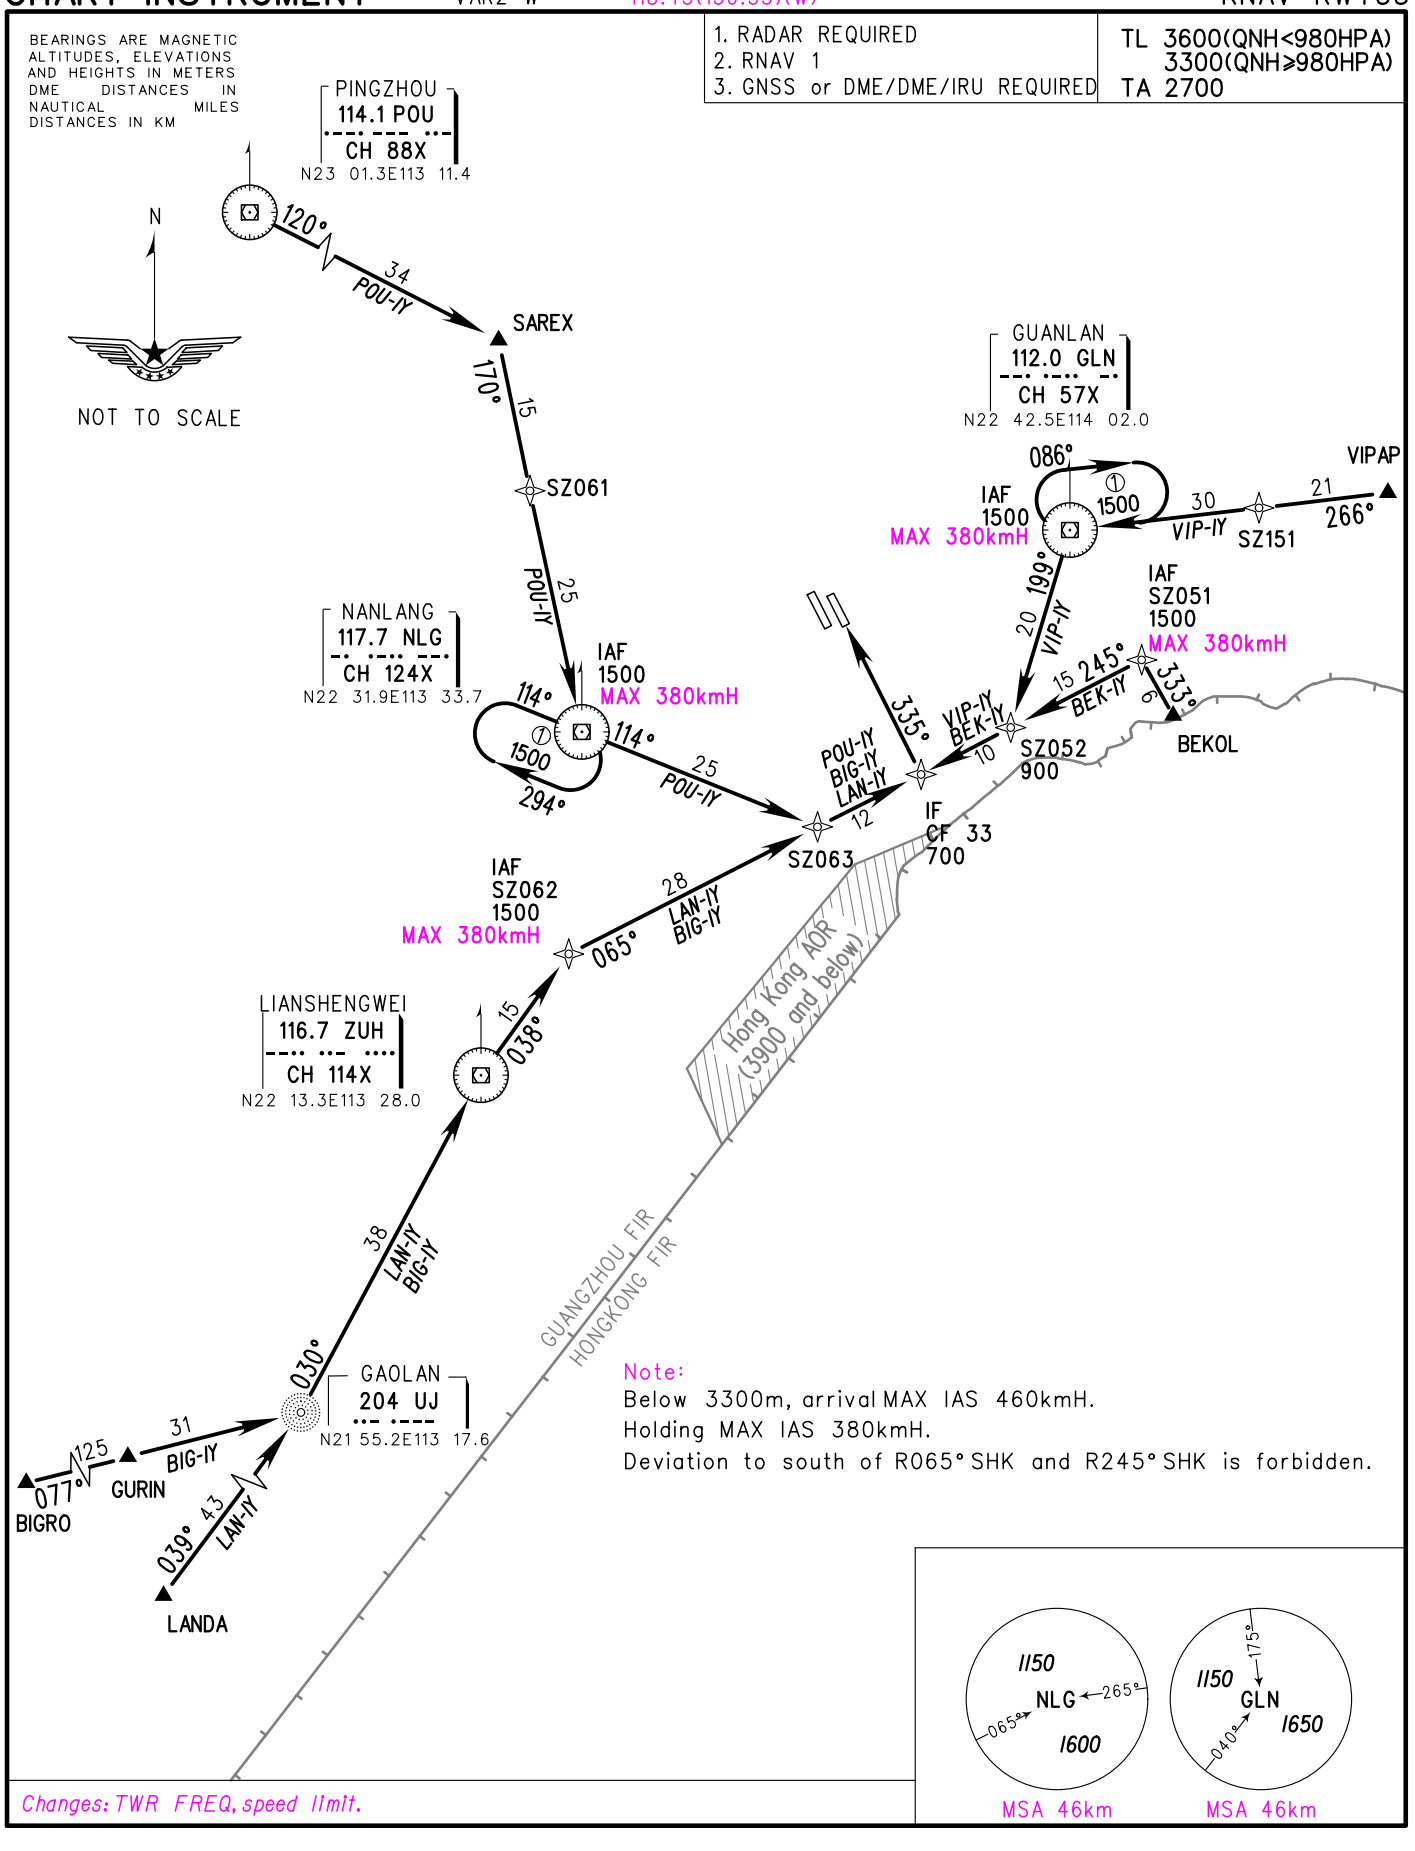

Note:
Below 3300m, arrival MAX IAS 460kmH.
Holding MAX IAS 380kmH.
Deviation to south of R065° SHK and R245° SHK is forbidden.

MSA 46km MSA 46km

Changes: TWR FREQ, speed limit.