


ATIS 127.65
D-ATIS 131.45
TWR 118.55(124.3)
GND 121.65

ZJHK HAIKOU/Meilan
N19° 56.0'E110° 27.6' ELEV 23m


AERODROME CHART

RWY	Direction	Bearing strength(PCN)
09	091°	RWY,TWY: 95/R/B/W/T APRON(Stands1-13,30-35,107-110): 85/R/B/W/T
27	271°	APRON(Stands14-17,101-106): 76/R/B/W/T

BEARINGS ARE MAGNETIC
ALTIMETERS, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS

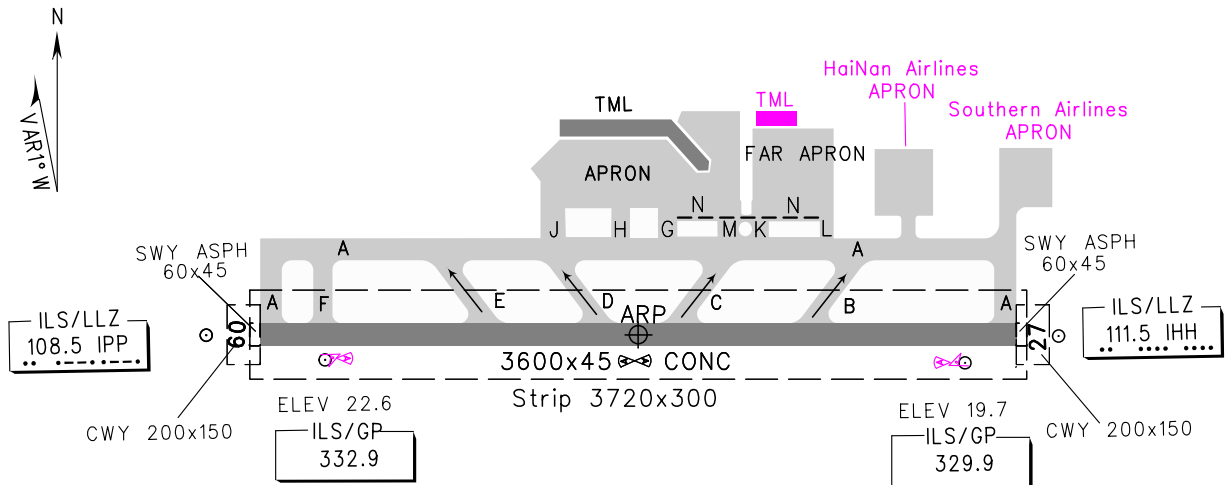

Note:
A/C are forbidden to enter RWY
via rapid exit TWYs B, C, D, E.

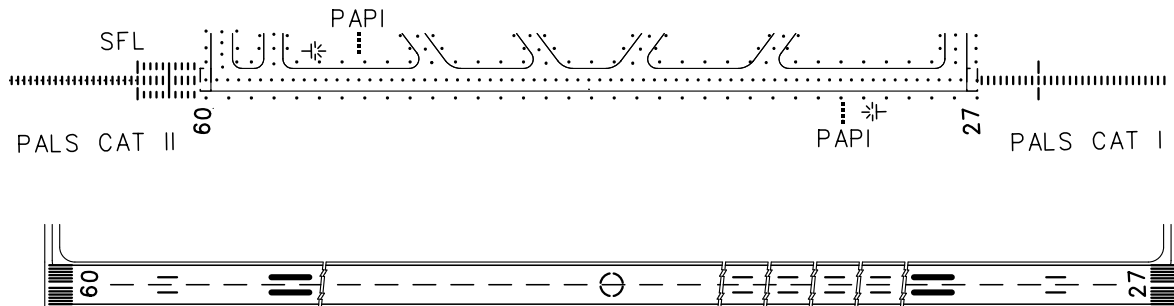

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	RWY09	RWY27
09/ 27	2 TURB ENG or 3&4 ENG	RVR400	RVR500	PALS CAT II PAPI SFL RCLL REDL	PALS CAT I PAPI RCLL REDL
	Other	VIS1600			

Changes: New apron, new TML, TWR FREQ, equipment location.