

STANDARD ARRIVAL CHART-INSTRUMENT

ZSPD SHANGHAI/Pudong






RNAV RWY34

VAR5° W



BEARINGS ARE MAGNETIC AND HEIGHTS IN METERS NAUTICAL MILES	ALTITUDES, ELEVATIONS DME DISTANCES IN DISTANCES IN KM	ATIS 127.85 D-ATIS 131.45	APP 120.3(119.75) AP01 (ZSSS) 125.4(119.75) AP02	126.65(128.05) AP05 126.3(120.65) AP06	TL 3600 TA 3000 3300(QNH≥1031HPA) 2700(QNH≤979HPA)
1. RADAR REQUIRED		TWR 118.8(118.325) TWR 01 (17L/35R)	125.85(119.20) AP03	121.1(124.05) AP07	
2. RNAV 1		118.4(118.725) TWR 02 (16/34)	123.8(119.20) AP04	127.75(124.05) AP08	
3. GNSS,DME/DME/IRU REQUIRED		124.35(118.325) TWR 03 (17R/35L)			

CAT C.D.E	3900/4500
	6300
CAT B	3900
CAT A	1500

SASAN

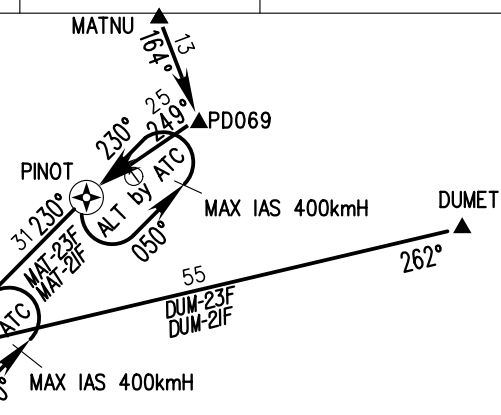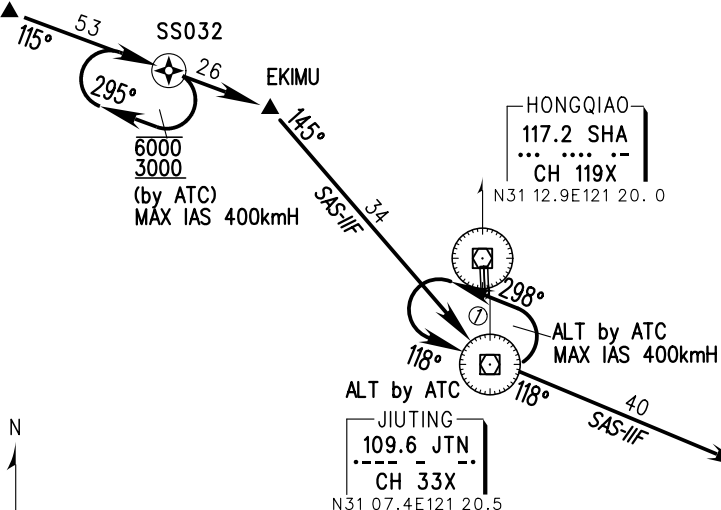

NOT TO SCALE

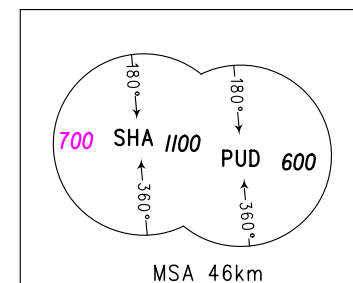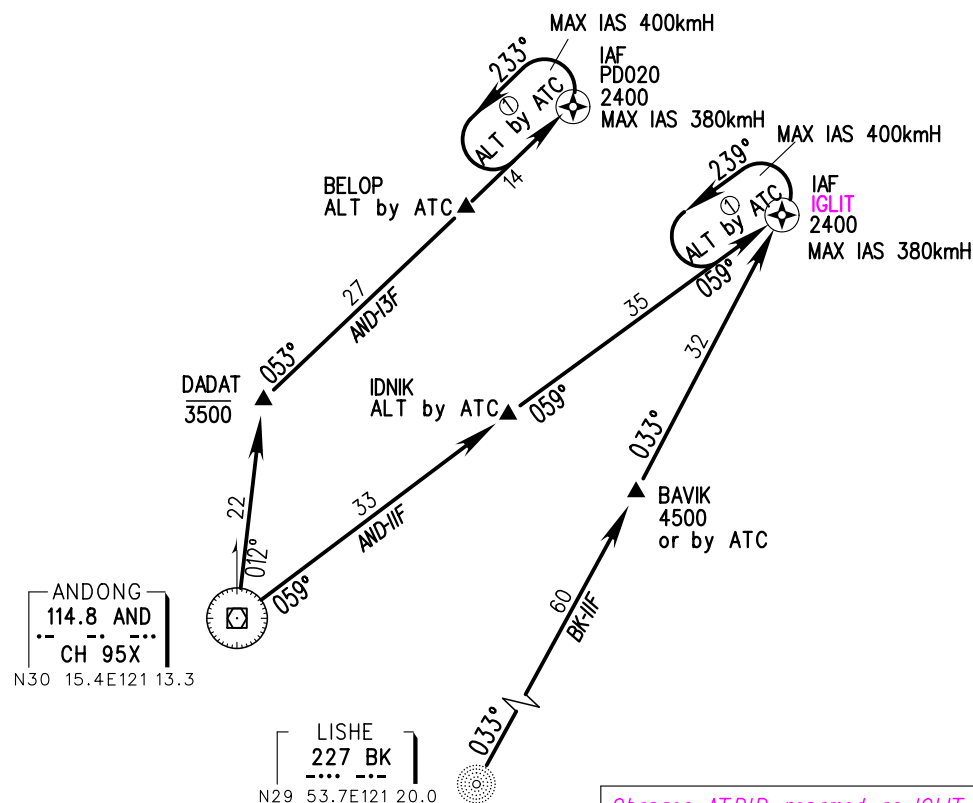

Changes: ATRIP renamed as IGLIT,MSA,TWR FREQ.