


AERODROME GROUND MOVEMENT  
AND AIRCRAFT PARKING CHART - ICAO

TOWER 118.600

ASTRAKHAN, RUSSIA

ASTRAKHAN

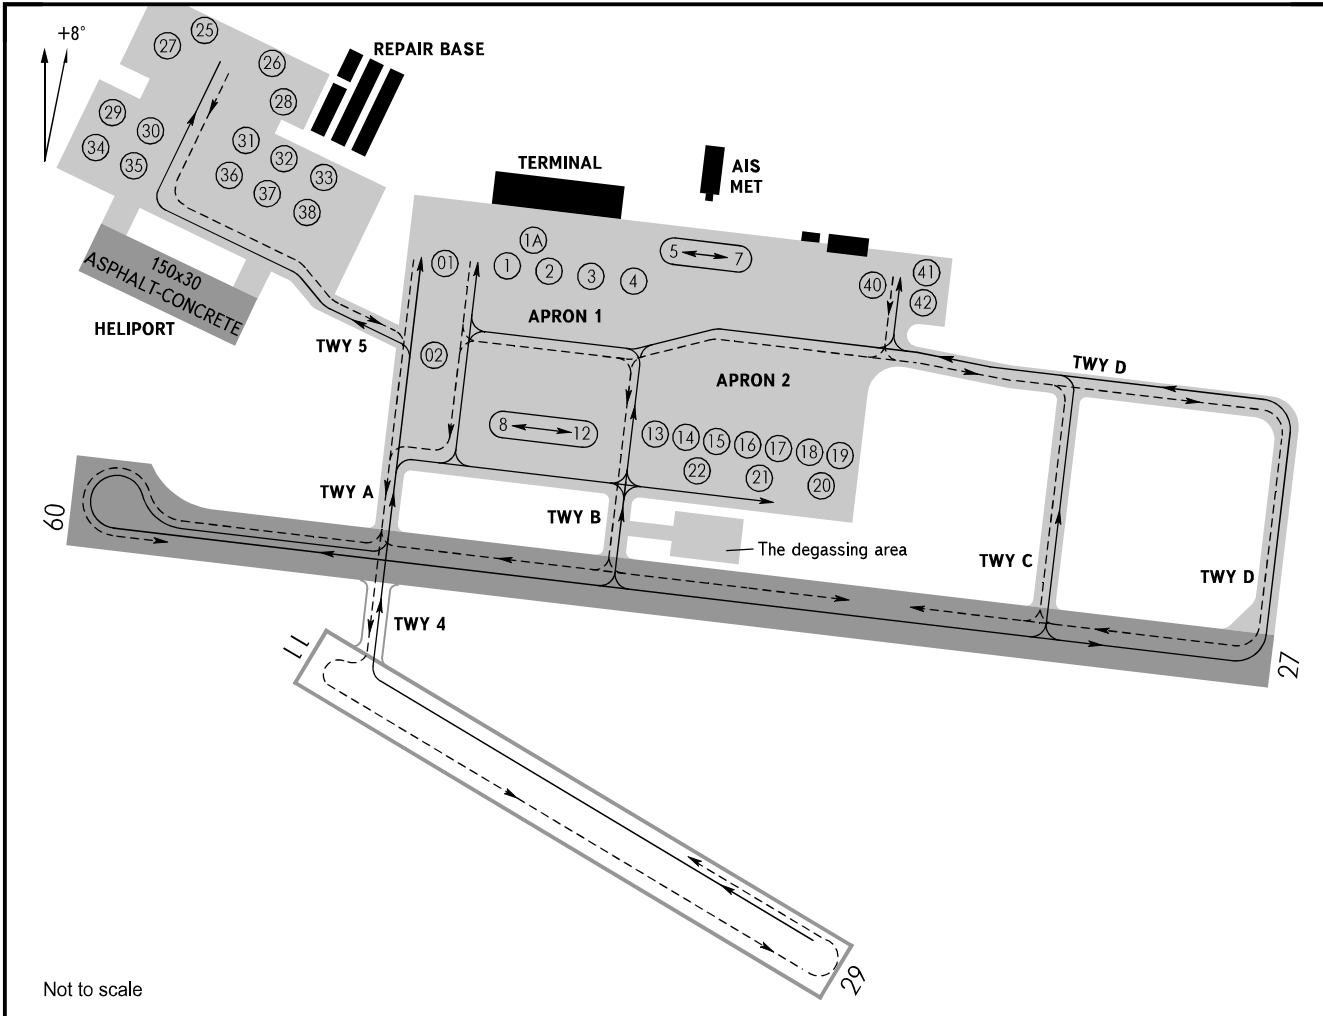

Not to scale

**APRONS:**

**APRON 1:**  
Surface: - Reinforced Concrete strengthened by Asphalt-Concrete  
Strength: - PCN 56/R/B/X/T mixed

**APRON 2:**  
Surface: - Asphalt-Concrete  
Strength: - PCN 89/F/C/X/T

Apron of government aircraft (stand 01 and stand 02):  
Surface: - Asphalt-Concrete  
Strength: - PCN 76/F/C/X/T

**TAXIWAYS:**

Width: A, B, C, D - 22.5m  
4 - 25m  
5 - 11.5m

Surface: A, B - Reinforced Concrete strengthened by Asphalt-Concrete  
C - at junction with TWY D - Asphalt-Concrete  
C - at junction with RWY - Reinforced Concrete strengthened by Asphalt-Concrete  
D, 5 - Asphalt-Concrete  
4 - Grass

Strength: A - PCN 64/R/B/X/T mixed  
B - PCN 59/R/B/X/T mixed  
C at junction with TWY D - PCN 65/F/C/X/T  
C at junction with RWY - PCN 68/R/B/X/T mixed  
D - PCN 63/F/C/X/T  
5 - PCN 10/F/C/Y/U  
Heliport - PCN 10/F/C/Y/U

**ACFT types:**

An-12, Il-18, Tu-154  
An-24, An-26, An-30,  
An-32, An-72, An-74  
An-28, Yak-40  
An-148  
Il-114, Yak-42  
Il-76T, Il-76TD  
Tu-204, Tu-214 and its  
modifications  
Tu-134  
A-320, A-321, B737-800  
A-319-100  
B737-300, B737-400, B737-500  
and its modifications  
B737-600, B737-700  
B757-200, B767-200, B767-300  
and its modifications  
B767-400 and its modifications  
BAe-146 and its modifications  
RRJ-95B and its modifications  
ATR-72, CRJ-100, CRJ-200,  
SAAB-2000 and its  
modifications  
ATR-42, EMB-120, SAAB-340  
and its modifications  
Mi-8 HEL  
HEL of all types

**STANDS:**

01, 02, 1A, 1-4, 20-22  
  
01, 02, 1A, 1-7, 9-18, 20-22  
01, 02, 1A, 1-22  
01, 02, 1A, 1-6, 9-18, 20-22  
01, 02, 1A, 1-6, 14-18, 20-22  
01, 20-22  
  
01, 02, 20-22  
01, 02, 1A, 1-6, 9-18, 20-22  
01, 02, 1A, 1-4, 20-22  
01, 02, 1A, 1-6, 14-18, 20-22  
  
01, 20-22  
20-22  
01, 02, 1A, 1-6, 9-18, 20-22  
01, 02, 1A, 1-6, 9-18, 20-22  
  
01, 02, 1A, 1-6, 9-18, 20-22  
  
01, 02, 1A, 1-22  
01, 02, 1A, 1-8, 13-19, 25-38, 40-42  
By controller's instruction

**WARNING:**

- Taxiing out of stands 1-7 under own engines power is prohibited.
- Taxiing of ACFT along TWY 5 shall be carried out only by towing.
- A 180-degree turn of all types ACFT on RWY 09/27 shall be carried out on turn pad at RWY 09 THR and at junctions of RWY with TWY A, TWY B, TWY C, TWY D.

CHANGE: ACFT types stands